



Tool clamping systems

Precision Collet Chucks CENTRO|P
High Performance Power Clamping System Maxi|GRIP
Tapping Chucks SYNCHRO|T

Overview of Contents

Page

The Precision Modular System	4
The trademark FAHRION	6
FAHRION Protect	10
Product Range	12
Maxi GRIP and SYNCHRO T	16

Precision Collets and Tapping Chucks

Precision Collet Chucks CENTRO|P

GER

GOZ

Tapping Chucks SYNCHRO|T

GB

Holder	Type	Page			
Taper Shanks DIN 69871	AD30	18	■		
	AD40-AD/B40	19	■	■	■
	AD50-AD/B50	22	■	■	■
Hollow Tapers DIN 69893 / ISO 12164	HSK-A32	23	■		
	HSK-A40	24	■		■
	HSK-A50	27	■		■
	HSK-A63	30	■	■	■
	HSK-A80	34	■		■
	HSK-A100	35	■	■	■
Hollow Tapers DIN 69893	HSK-E25	36	■		
	HSK-E32	37	■		
	HSK-E40	38	■		
	HSK-E50	39	■		
	HSK-E63	40	■		
	HSK-F50	40	■		
	HSK-F63	41	■	■	
Polygonal Shanks ISO 26623-1	C3	42	■		
	C4	43	■		
	C5	44	■		
	C6	45	■		
	C8	46	■		
Taper Shanks JIS B 6339	MAS/BT30 (AD)	47	■		
	MAS/BT40 (AD•AD/B)	49	■	■	■
	MAS/BT50 (AD•AD/B)	52	■		■
Taper Shanks ANSI B.50	CAT40 (AD/B)	53	■		
	CAT50 (AD/B)	55	■		
Cylindrical Shanks	Z (AD)	56	■		■
Taper Shanks similar to DIN 69871 (Wood working)	A30 (AD)	57	■	■	



GER

GOZ

GB

Page

Precision and Tap Collets

Precision Collets GERC-HP DIN ISO 15488-B (ER/ESX)	65	■		
Precision Collets GERC-HPD similar to DIN ISO 15488-A with Seals for IC (Inner Coolant Supply)	66	■		
Precision Collets GERC-HPDD similar to DIN ISO 15488-A with Seals for IC (Inner Coolant Supply) and Jet Holes	67	■		
Tap Collets GERC-GBD similar to DIN ISO 15488-A with Seals for IC (Inner Coolant Supply)	68	■		■
Tap Collets GERC-GBDD similar to DIN ISO 15488-A with Seals for IC (Inner Coolant Supply) and Jet Holes	69	■		■
Precision Collets GOZ DIN ISO 10897-B	70		■	


Accessories

Clamping Nuts HPC	58	■	■	
Roller Bearing Wrenches RO DRO	63	■	■	■
Torque Setting Wrenches DRMO	64	■	■	■
Mounting Devices TBRS	64	■	■	■
Sealing Discs DI DIG	71	■	■	
Data Carriers BIS	71	■	■	■
Adjustable Stop Screws AS-U AS-W	72	■	■	
Taper Wipers KW	73	■	■	■
Flex-Hone Brushes FH	73	■	■	■
Coolant Supply Tubes and Wrenches IKR SCHL-IKR	74	■	■	■
Pull Studs AZB	75	■	■	■
High Performance Power Clamping System Maxi GRIP	78	■	■	

Conversion Table	79
Ordering example	79
Balancing	80

We reserve the right to change the design and specification of any product shown within this catalogue, which does not result in the adverse function of the corresponding tools.

The FAHRION Precision Modular System

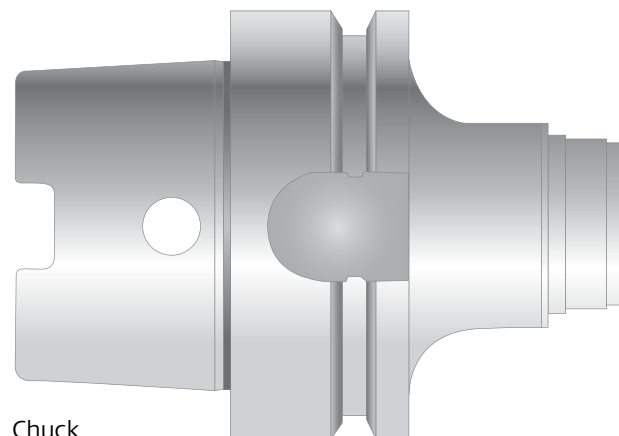

Chuck

Holder

For all common spindle holder types.

Version

The CENTRO|P Precision Collet Chuck is available in two versions for different collets. In addition there is an optimised Tapping Chuck: the SYNCHRO|T.

Chuck Form

The chuck is classified into three basic forms. Different chuck diameters and lengths give rise to 280 variants of the CENTRO|P. A unique variety of possible applications. Mixed forms such as Mini-Tapered and Tapered-Standard are possible.



= DIN 69871
SK
30/40/50



= DIN 69893/ISO 12164
HSK-A
32/40/50/63/80/
100



= DIN 69893
HSK-E
25/32/40/50/63



= DIN 69893
HSK-F
50/63



= ISO 26623-1
C
3 / 4 / 5 / 6 / 8



= JIS 6339
MAS/BT
30/40/50



= ANSIB5.50
CAT
40/50



= DIN 1835
Z
10/16/20/25/32

GER

CENTRO|P
- for collets according to DIN ISO 15488-B(ER/ESX) and FAHRION tap collets similar to DIN ISO 15488-A
- very high concentricity of $\leq 3 \mu\text{m}$ with FAHRION collets GERC-HP/HPD/HPDD

GOZ

CENTRO|P
- for collets according to DIN ISO 10897-B(OZ)
- extremely stable versions with holding forces of over 600Nm with CP432
- ideal for rough milling

GB

SYNCHRO|T
- for Tap collets similar to DIN ISO 15488-A with internal square drive
- with minimum length compensation




MINI
- slim version for HPCM Mini Clamping Nuts
- small interference contour
- External diameter of clamping nuts 10/16/22mm
- Clamping ranges 1 – 5 mm (GERC8), 1 – 7 mm (GERC11), 1 – 10 mm (GERC16)
- Standard projection lengths (dimension A) of 50/70/100/4"/130/6"/160mm (type-dependent)
Application examples: HSC machining, die and mould making, medical and dental technology, drilling/reaming/finishing




TAPERED
- tapered version for HPCC Special Clamping Nuts
- small interference contour with External diameter of clamping nuts 16/22/24mm
- Clamping ranges 1 – 7 mm (GERC11), 1 – 10 mm (GERC16)
- Standard projection lengths (dimension A) of 45/55/60/100/4"/130/6"/160mm (type-dependent)
Application examples: HSC machining, model, mould and tool making, drilling/reaming/finishing and roughing



STANDARD
- rigid version for HPC Standard Clamping Nuts
- External diameter of clamping nuts 30/32/40/50/63mm
- Clamping ranges 1 – 10 mm (GERC16), 1 – 13 mm (GERC20), 1 – 16 mm (GERC25), 2 – 20 mm (GERC32), 3 – 26 mm (GERC40), 2 – 25 mm (FM25DG), 4 – 32 mm (FM32DG)
- standard projection lengths (dimension A) of 40/48/50/60/2,5"/70/3"/80/85/90/100/4"/120/5"/130/6"/160/200mm (type-dependent)
Application examples: HSC and HPC machining, model, mould and tool making, drilling/reaming/finishing/roughing, machining of wood



Collet



Clamping nut

Cooling

Suitable for all possible methods of supplying cooling lubricant.

The central component of the FAHRION modular kit, the collet, is available in several versions differing in accuracy, area of application and coolant application.

Since the chuck body is supplied without clamping nuts, these must be ordered separately. You have the choice between the standard version and the version for sealing discs!

- central (AD)
- laterally via the collar (C)
- minimum-quantity lubrication (MQL)
- air cooling
- peripheral cooling along the shaft by means of larger sealing disc

Pull Stud
 DIN 69872 Form A
 Cooling lubricant supply through the centre
 Form AD/BT



Pull Stud
 DIN 69872 Form B
 Cooling lubricant supply via the collar
 Form B/BTB



GERC-HP
 Precision Collet 2 µm
 DIN ISO 15488 - B(ER/ESX)



GERC-HPD
 Precision Collet 2 µm
 similar to DIN ISO 15488 - A
 with Seals for IC (Inner Coolant Supply)



GERC-HPDD
 Precision Collet 2 µm
 similar to DIN ISO 15488 - A
 with seals for IC (inner coolant supply) and jet holes



GERC-GBD
 Tap Collet
 similar to DIN ISO 15488 - A
 with internal square drive and seals for IC (inner coolant supply)



GERC-GBDD
 Tap Collet
 similar to DIN ISO 15488 - A with
 internal square drive, seals for IC
 (inner coolant supply) and jet holes




GOZ-DG-HP
 Precision Collet 3 µm
 DIN ISO 10897 - B

Technical Information



The chucks marked with MQL are suitable for minimum quantity lubrication. In MQL the required amount of lubricant for the cutting tool is reduced to a minimum by means of a dosing technique. This is supplied to the cutting point either directly or finely dispersed via an air stream. After clarification of all technical details we can convert MQL-compatible chucks.

Table for converting inches to mm
 see page 79

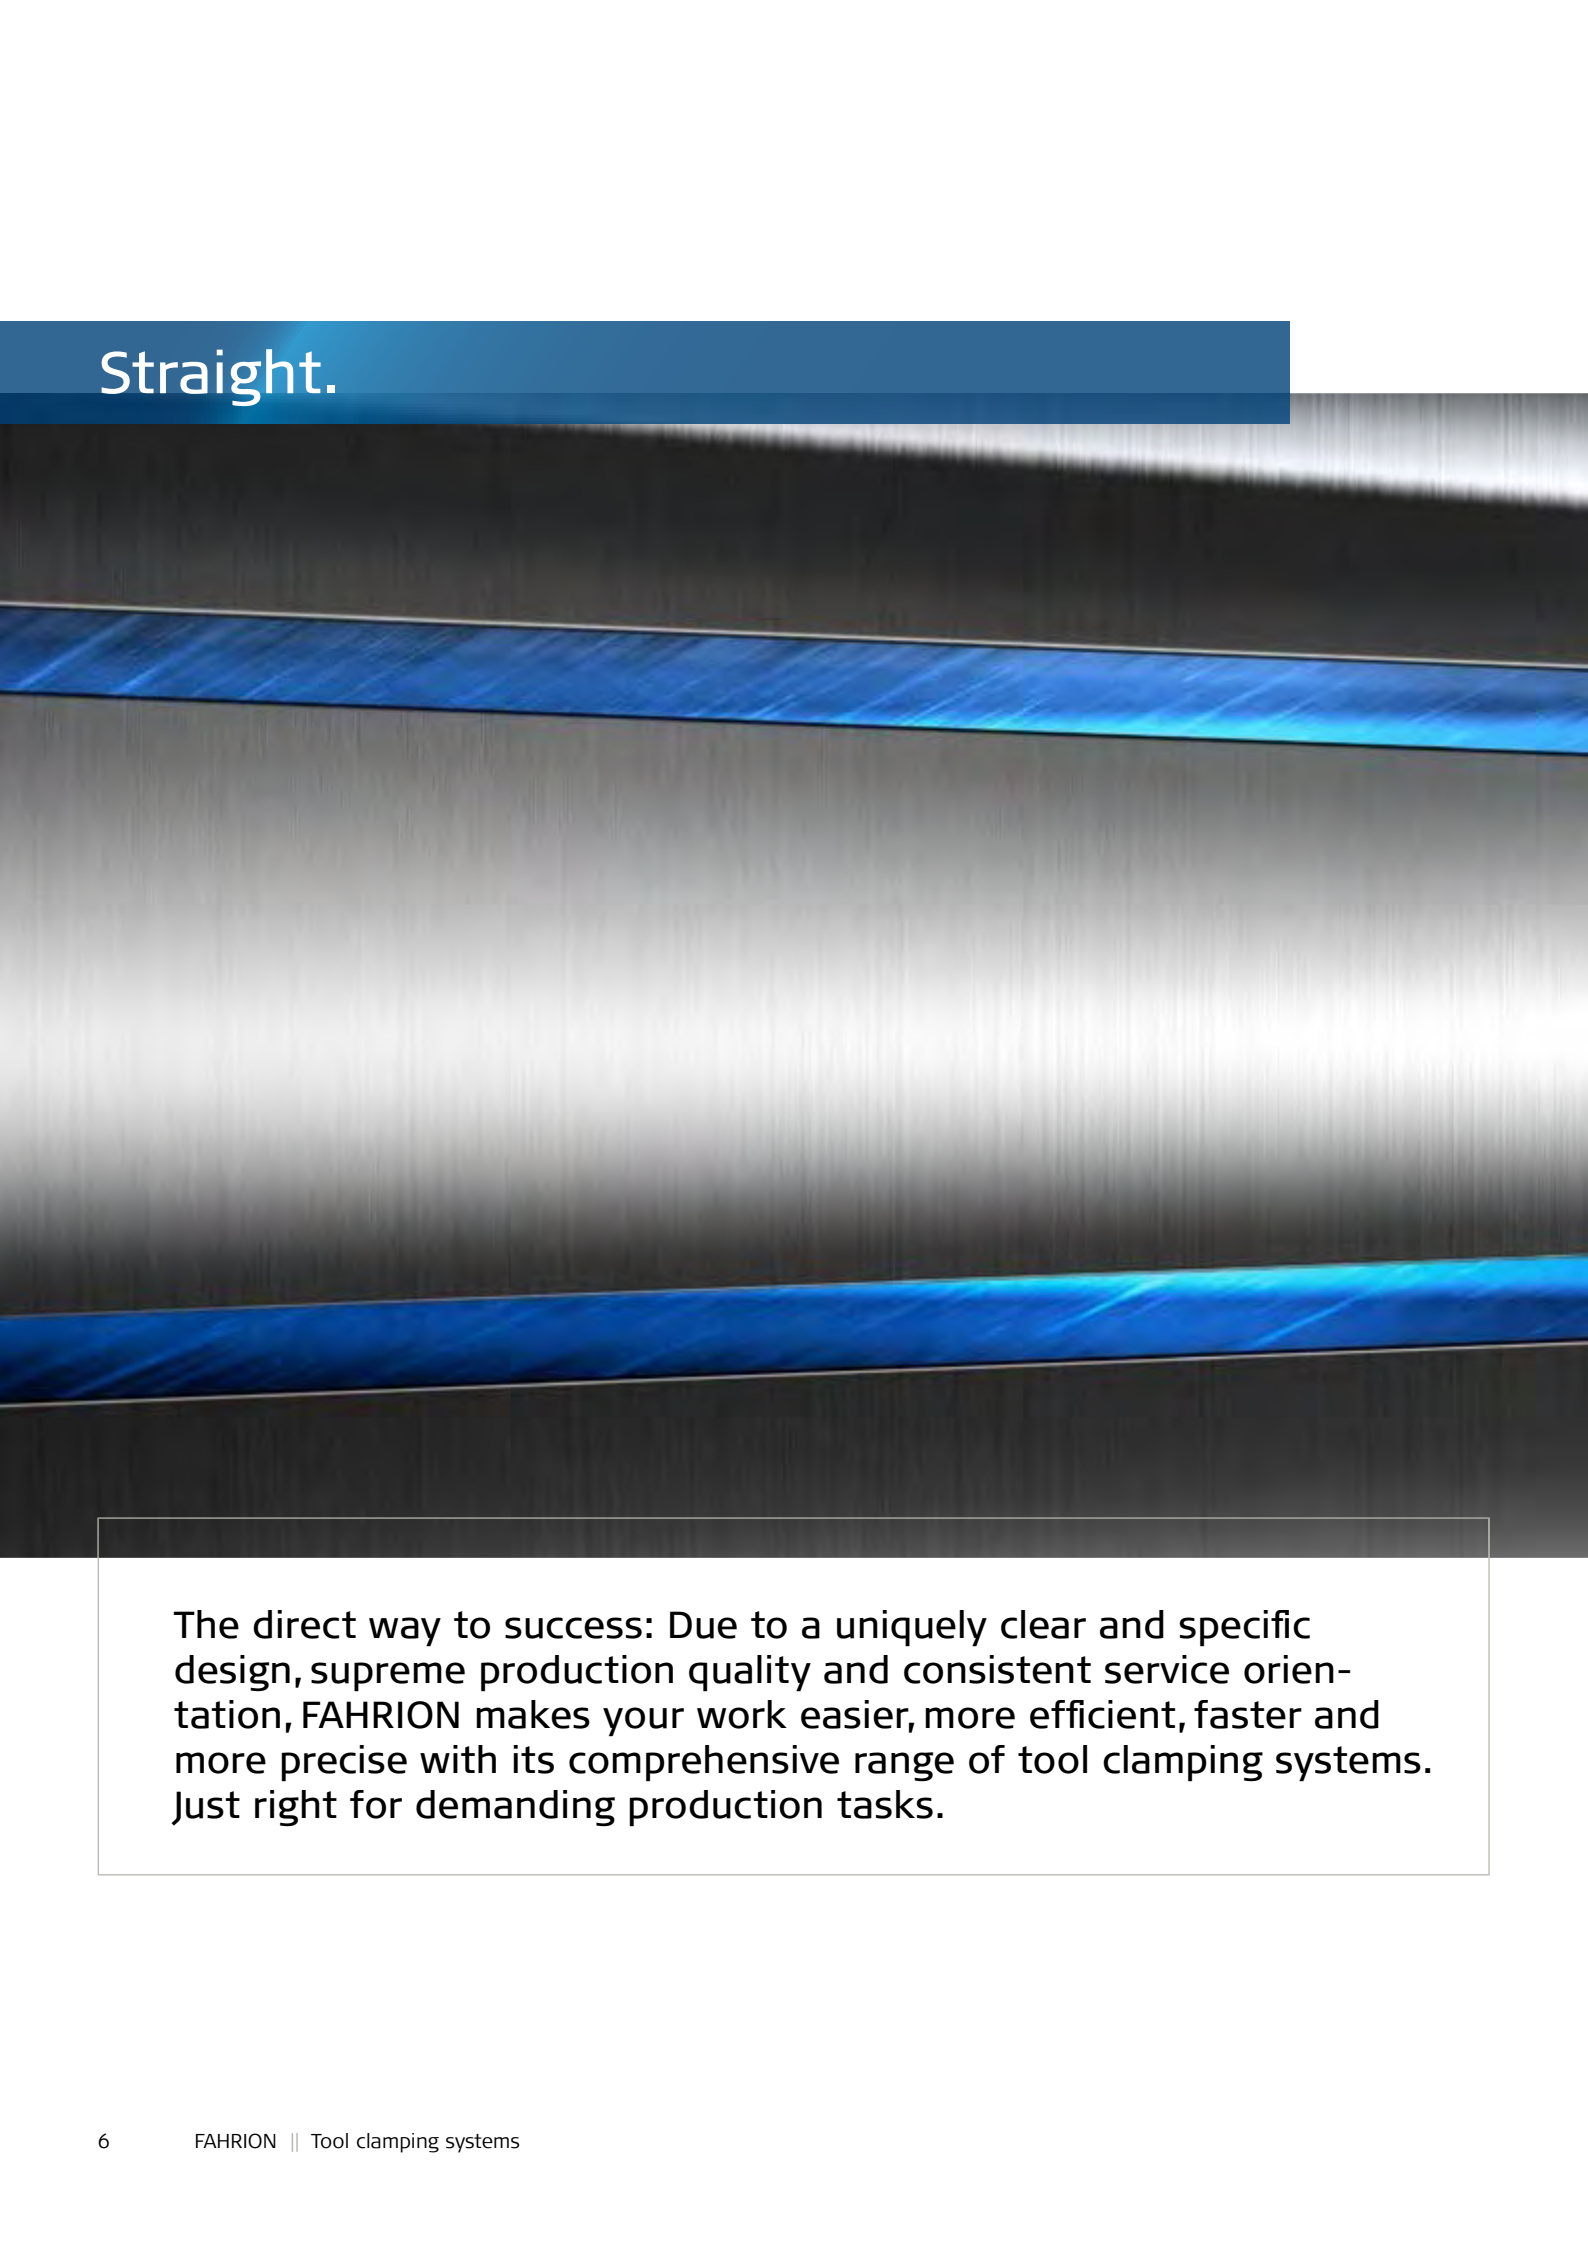

Straight.

The direct way to success: Due to a uniquely clear and specific design, supreme production quality and consistent service orientation, FAHRION makes your work easier, more efficient, faster and more precise with its comprehensive range of tool clamping systems. Just right for demanding production tasks.



Close to your demands:
Every detail is optimized for
maximum functionality.

For decades, FAHRION has been following an uncompromising line, when it comes to supporting your work: All FAHRION products and services are directed to convince with maximum functionality and application orientation – at an excellent price-performance ratio.

In terms of quality, FAHRION products offer performance values already in the standard product range which for other producers are limited to expensive premium series. Our DIN ISO 15488 (ER/ESX) and DIN ISO 10897 (OZ) based precision collets are produced with tolerance values which lie significantly below the required DIN norm.

Together with the patented FAHRION precision collet chuck CENTRO|P and other high performance system components, our collets form a perfectly integrated complete system which guarantees maximum precision, stability, flexibility, reliability and cost effectiveness.

At the same time FAHRION is a manufacturer which continuously and critically monitors and optimizes its product portfolio – therefore, FAHRION technology brings you the maximum possible benefit at any time and with every order.

Evident.



FAHRION clamping systems can manage highly complex challenges. At the same time we have done everything to ensure that our solutions remain conceivably uncomplicated and highly transparent for you. This way, you can assure a distinct advantage in terms of profitability.

Focussed on the user

FAHRION user-friendliness starts with the product range. We provide exactly those solutions which you need in your daily work – and only technology which really provides functionality enters FAHRION's clamping systems.

In addition to the common models, we do not only offer products which meet very special process requirements, but which can, nevertheless, be also easily assembled and effectively used. We support you with all our expertise in finding and using your dedicated FAHRION solution – for example in the FAHRION Technology Centre, where we convey broad know-how under real working conditions.

Smooth.




All runs smoothly – with excellent results: That is our promise to everyone who trusts in FAHRION clamping systems. Production processes with FAHRION solutions provide exactly those results which meet your specifications – with especially careful use of your valuable machinery.

Optimize your process

Excellent concentricity and repeatability, optimal balancing quality, perfectly matched and carefully tested system solutions: These are only a few of the technical features which assure that you can completely rely on FAHRION products.

Thanks to the smooth production processes in the highest quality, you can deliver the requested parts more quickly to your customers, while customer satisfaction ensures profitable follow-up orders. In addition, less process steps are required because the FAHRION precision reduces the number of faulty products – and thus the need for post processing work – to a minimum. Moreover, long service life of machine and tools is guaranteed with your own machine technology.

FAHRION|Protect

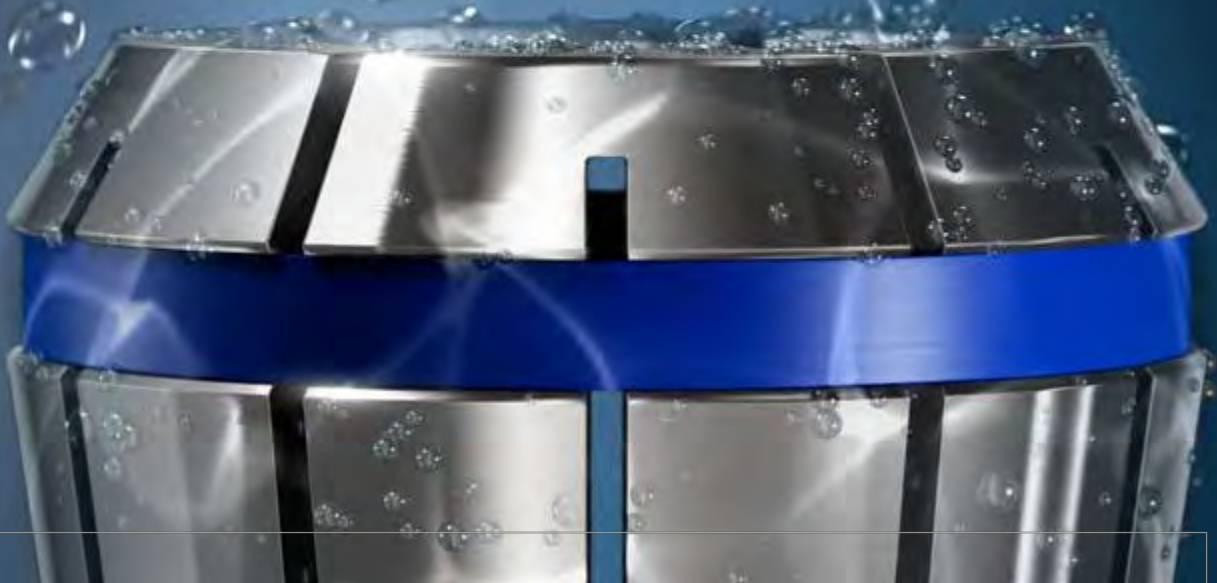

Rust on collets reduces the lifetime of your tools and leads to significant loss of precision. Therefore, we have now developed FAHRION|Protect: A pioneering new technology which protects collets from corrosion in the long term.



Collets with corrosion protection of the functional surfaces in the μ -range

FAHRION|Protect goes beyond all standards that you know in corrosion protection of clamping tools. Many clamping tools are not protected at all. With others, the corrosion protection is limited to the visible areas only. Or with cutting tools with insert pockets, only an accuracy of about 0.01 mm is required.

FAHRION is the first manufacturer to offer a coating of the functional surfaces in the μ -range – over its complete and finely tuned product range. FAHRION|Protect conserves FAHRION collets effectively from external influences and preserves their functionality and precision for a longer time. That is how FAHRION shows once again in an impressive way how advanced technology can be brought to the market as an integrated customer solution.



Two collets each after 4 months of use:
The left one without coating – the right one with FAHRION|Protect

FAHRION|Protect: **Stops corrosion. Solves the problems.**

The comparison with conventional unprotected collets shows: Without a coating, the collet is affected by corrosion in a short time – whether by humidity, cooling lubricant, cleaning solutions, salts or gases. This does not only affect the collet but also your complete system.

Optimize your work in many ways:

Coated collets by FAHRION are corrosion protection, quality protection, investment protection and environmental protection all in one:

- The nominal geometry between the collet and the taper seat in the chuck is maintained for a long lasting permanent surface contact without corrosion-related irregularities.
- The parts in manufacturing stay longer in the specified tolerances. The number of faulty parts decreases.
- You can keep production processes longer on a high level, you can save time and you can also guarantee short terms of delivery.
- A higher concentricity extends the tool lives. Thus, you save time and money by reducing set up times.
- Collets have to be replaced less frequently or can be used longer for precision applications.
- Less imbalance on the tools relieves the machine spindle permanently – your maintenance costs will be reduced.
- Longer service life saves valuable resources.

The new technology is established in the FAHRION factory and integrated in the production process. This means: no matter in which field or which type of collets you use – you can benefit from the new technology in any case

The FAHRION Product Range



Precision Collets



Precision Collet Chucks CENTRO|P



Tapping Chucks SYNCHRO|T



High-Performance Power Clamping System Maxi|GRIP

The FAHRION Precision Collet

The heart of the technology is the collet: For many years, the combination of a specially manufactured steel and our unique production technology has enabled FAHRION to manufacture top-quality collets according to DIN ISO15488 (ER/ESX) in an outstanding quality with a maximum accuracy of 2 µm.

The FAHRION CENTRO|P Precision Collet Chuck

The CENTRO|P's legendary reputation on the market is no coincidence. It is one of the best collet chucks that money can buy. Combined with the

FAHRION collets, which are perfectly matched to this chuck, it achieves a system accuracy of 3 µm and avoids the need to use expensive hydraulic expansion and shrinking techniques. In this catalogue we explain in detail the many different benefits of this technology with regard to accuracy, holding force, flexibility and price-performance ratio.

The FAHRION SYNCHRO|T Tapping Chuck

By compensating the pitch differences or tolerances of the tap and the synchronous spindle, the machining results can be optimised while main-

taining quality and cost-effectiveness. A special tapping chuck with minimum length compensation is required for this.


Even more Power with the Maxi|GRIP High Performance Power Clamping System

In order to be able to use the CENTRO|P clamping technology for extreme roughing and highly resistant materials as well, this simple but technically ingenious clamping technology increases the holding torque of the CENTRO|P to 800 Nm and more.


CENTRO|P – Greater profitability through unique precision

Although it costs more than a standard collet chuck, a precision collet chuck wins by a mile in terms of cost-effectiveness. With maximum precision you achieve better machining results with considerably smaller manufacturing tolerances, thus saving expensive reworking. In addition, precision means that longer service lives of the cutting tools are achieved and that the machine spindle is preserved even during the most complex work. There are convincing reasons that it pays off in a short time to purchase precision collet chucks. Due to the system accuracy of $3\mu\text{m}$ the CENTRO|P does not only stand at the top of precision, but also for long-term cost savings.


Effect of runout on the cutting edges




Irregular load on the cutting edges



Wear on tool increases, surface quality of the workpiece is getting worse



Feed has to be reduced

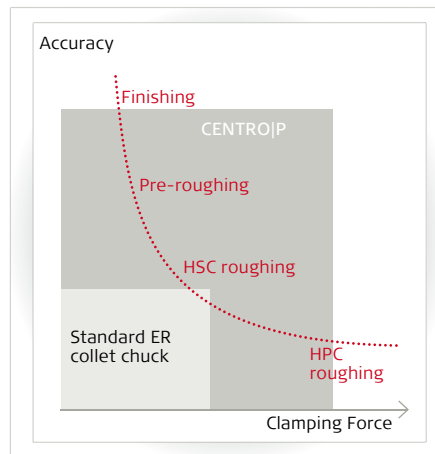


Accuracy and Holding Force

The FAHRION CENTRO|P belongs to the absolute top class of collet chucks. Unique, patented design features achieve a far higher accuracy than conventional ER collet chucks. Furthermore the system provides impressively higher holding forces. So the CENTRO|P can be used in a much wider field of applications.



Optimum Design

Due to well-thought-out chuck design, we achieve maximum symmetry with minimum residual imbalance. Further design features are the ground 30° trapezoidal thread and the special coating of the nut, which reduce friction and, together with the double guiding, ensure accurate centring of the nut on the chuck.

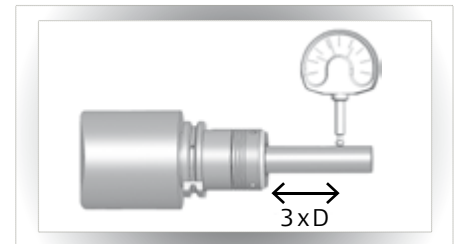





High Concentricity and Repeatability

Together with the FAHRION GERC-HP Precision Collets an outstanding system accuracy of $3\mu\text{m}$ is reached (at $3 \times D$, max. 50 mm). Consequence: You achieve up to six times the precision of a conventional ER collet chuck.

Maximum Balancing Quality

The chuck is a central element for the dampening of vibrations in the system of machine spindle, tool holder and tool. For this reason great importance is attached to the balancing quality of CENTRO|P Precision Collet Chucks. They are finely balanced for speeds up to 60.000 rpm, thus achieving maximum dimensional accuracy, surface quality and tool service lives.

Technology with more gripping power.

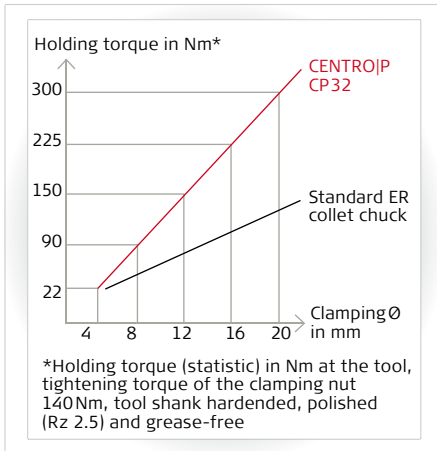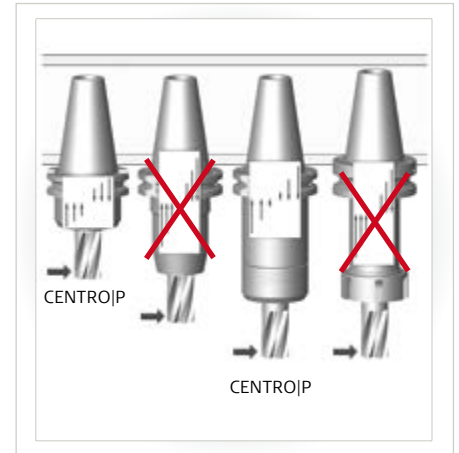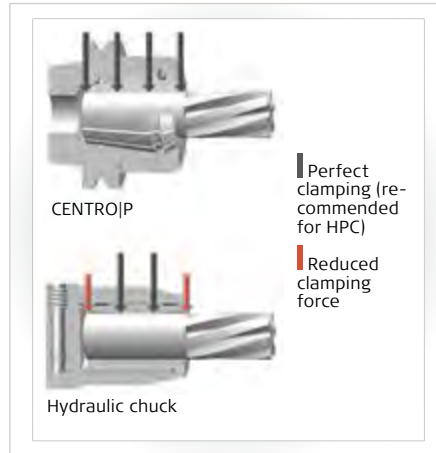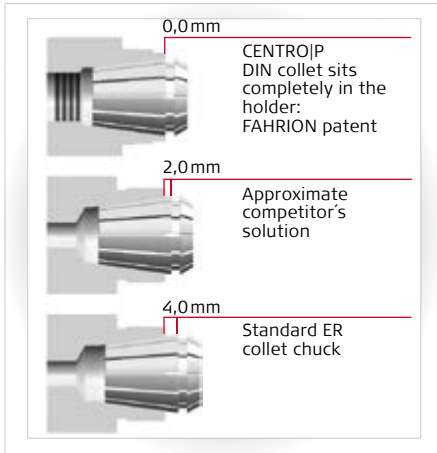

High Holding Force

In FAHRION's patented collet system the collet sits completely inside the collet closing taper. Due to the unique design it does not apply the usual bridging, thus enabling holding forces twice as high as those of conventional collet chucks. The ground trapezoidal thread, the polished surface of the collet and the finish in the bore of the collet further increase the holding forces. This ensures high security and enables rough machining with optimum results.

Immense Stability

The special design of the CENTRO|P achieves a better and more even distribution of the clamping forces over the entire cylindrical surface of the tool shank and the radial forces are optimally absorbed. So milling operations produce perfect surfaces.


High Rigidity

The reduction of bending and compressive forces creates an enormous stability. This principle was used and put into practice by the construction of CENTRO|P. The chuck body is reinforced to the diameter of the clamping nut, leading to maximum rigidity and an optimum interference contour.

Strong and Insensitive

Even insensitivity is a strong point. The CENTRO|P is resistant to temperature fluctuations and is fully suitable for dry processes and hard milling up to 200°C.

System intelligence in every detail

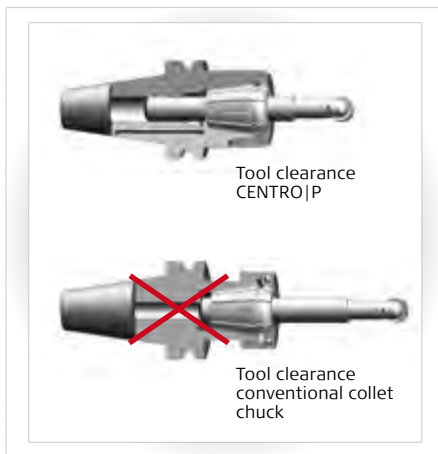

Greatest Possible Dampening

The constructive principle of our collets absorbs vibrations. The mass of the chuck optimizes the dampening even further. This conserves the machine and the spindle and extends the warranty.

Environmental Protection

Even when it comes to the economical use of energy and resources, FAHRION technologies are groundbreaking. Thanks to its perfect concentricity, CENTRO|P reduces the power consumption of the spindle. Workpieces can be machined in a shorter time, as a result of which, less electricity is used. Dry machining is possible, saving the costs for water, cooling units, and disposal. In addition, tool wear is reduced, and the tools don't need to be replaced so often.



Simple Handling

Despite its many technical advantages, an ingeniously simple, mechanical collet chuck requires no peripheral devices. It can be clamped simply, quickly, and securely, using the roller bearing wrench. The high purchase costs for ancillary equipment can be dispensed with.

Variable Cooling

CENTRO|P is suitable for all methods of cooling lubricant supply (central, laterally via the collar, minimum quantity lubrication, air cooling or peripheral cooling along the tool shank, jet-holes).

Largest Possible Tool Clearance

The CENTRO|P is designed in such a way that it offers the largest possible tool clearance and thus an extra-long length adjustment range. Hence, the tool can be clamped at the optimum tool projection length, whereby vibration is prevented, the tool is preserved, and the surface finish is optimised.

Universally Usable

The CENTRO|P is ideal for drilling, countersinking, reaming, milling, for HPC / HSC, and for tapping.

Intelligent Clamping System

The clamping nut of the CENTRO|P is tightened with a roller bearing wrench. The clamping nuts are marked with the maximum torques, which depend on the diameter to be clamped. In principle the maximum tightening torques can be used; for finishing machining, however, we recommend tightening the clamping nut only to 50-70% of the maximum tightening torque in order to obtain the optimal machining results on account of a higher degree of damping. The clamping nut itself is manufactured completely symmetrically and has no slots or holes.

On Request with Collapse

By means of a special clamping nut, a collapse up to 0.4 mm can be achieved with the GER-HP collet.

Maxi|GRIP – The High Performance Power Clamping System with a Holding Torque of 800 Nm



The machining of highly resistant materials such as stainless steel or titanium is increasingly in demand, placing high demands on the holding torques of your tool clamping systems. The newly developed Maxi|GRIP High Performance Power Clamping System doubles the already high holding torques of the CENTRO|P Precision Collet Chuck and thus enables extreme rough machining. With the specially developed and patented induction technology the range of application of the CENTRO|P Precision Collet Chuck is expanded, tool service lives are extended and top surface qualities are achieved. The total system costs are thus reduced.

Maxi|GRIP – The Intelligent Solution

In combination with the CENTRO|P, this thermal clamping system enables holding forces of up to 800 Nm and higher to be achieved. For years CENTRO|P has set standards in concentricity, dampening, stability and, in 80% of applications, in clamping force, too; the increased demands on the holding torque are now met and even exceeded with Maxi|GRIP.

Process Reliability with High Functionality

A tool is clamped as usual in the CENTRO|P using the roller bearing wrench (e.g. with 140 Nm for a 20 mm tool). The nut is subsequently heated up to 150 °C within a few seconds by an inductive heat source (380V). The process thus remains in the low temperature range. The temperature difference provides for a slight expansion of the clamping nut in relation to the collet chuck. After heating up, the clamping nut is retightened to 140 Nm using the torque wrench. This additional rotation of the clamping nut more than doubles the holding torque.

Precision, Concentricity and Dampening Remain Outstanding

The enormous increase of the holding torque does not result in less precision. With a concentricity of 3 µm (based on a tool with a projection length of 3xD), the usual FAHRION quality is retained in full. The advantage of the low temperature range – for example in relation to shrinking with up to 300 °C and water cooling – also lies in the short cooling phase and the cheaper equipment. FAHRION's cooling solution con-

sists of a simple cooling bath, in which the tool is cooled down to lukewarm within just one minute. It has been verified that the small temperature differences have no negative effect on the microstructure of the material. The dampening characteristics also remain outstanding, although they are slightly reduced by the thermal clamping. The good cushioning characteristics are mainly attributable to the multipart clamping system, in which the collet absorbs vibrations on account of its dampening capacity.

Main Advantages

- = Maximisation of the holding torque to over 800 Nm
- = Constant high precision
- = Outstanding dampening
- = Longer tool life
- = Machining of highly resistant materials

SYNCHRO|T – The Perfectly Optimised Tapping Chuck



The SYNCHRO|T Tapping Chuck compensates differences in pitch between the tap and the synchronous spindle as well as compensating the pitch tolerances of the tap. It provides for a cushioning effect between the tool and spindle during synchronised tapping (rigid tapping) on machining centres with synchronous spindles.

Versatile Properties

- = minimum length compensation on compression/tension ($\pm 0.5\text{ mm}$)
- = high radial rigidity due to double bearing
- = high concentricity
- = high clamping force due to clamping by tap collets with internal square drive
- = separate compression/tension mechanism
- = defined adjustable compressive/tensile forces

- = compact, wear-free design
- = long service life
- = internal coolant feed possible in all types
- = no clamping nuts for sealing discs are required when using coolant, since the FAHRION GERC-GBD Tap Collets are generally supplied with seals (usable up to 120 bar)
- = minimum quantity lubrication (MQL) possible on request


Advantages in Synchronous Tapping

- = absolute process reliability due to minimum length compensation
- = low risk of breakage
- = high service lives of the taps (up to 150% higher than with a rigid collet chuck)
- = improved thread quality
- = fewer machine downtimes

Conclusion

In order to achieve the optimum cutting result, the FAHRION SYNCHRO|T Tapping Chuck should be used on machines with synchronous spindles even where the latest controllers are involved so as to extend service life and improve quality.


Collet Chucks with Taper Shanks DIN 69871 – AD30

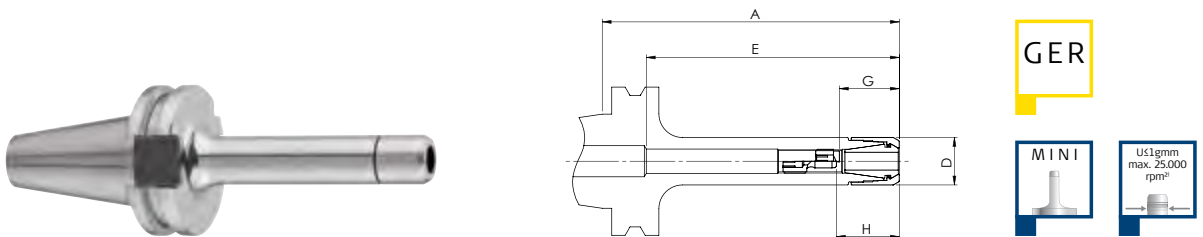

CENTROJP – Slim Version for HPCM Mini Clamping Nuts

Description	Order-No.	Form	D	A ¹⁾	max. tool in- sertion depth without stop	Tool insertion depth with stop				Clamping Range / Collets	Clamping Nuts
						Type U		Type W			
					E	G max.	G min.	H max.	H min.		
CP11M-AD30-A=50	43213000500	AD	16	50	36	36	18	26	12	1,0–7,0 GERC11-HP/HPD	HPC11M• HPC11M-DI
CP11M-AD30-A=100	43213001000			100	85						

Accessories: Clamping Nuts page 58, Wrenches pages 63, 64, Mounting Devices page 64, Precision Collets pages 65, 66, Stop Screws page 72, Taper Wipers page 73, Flex-Hone Brushes page 73, Pull Studs page 75

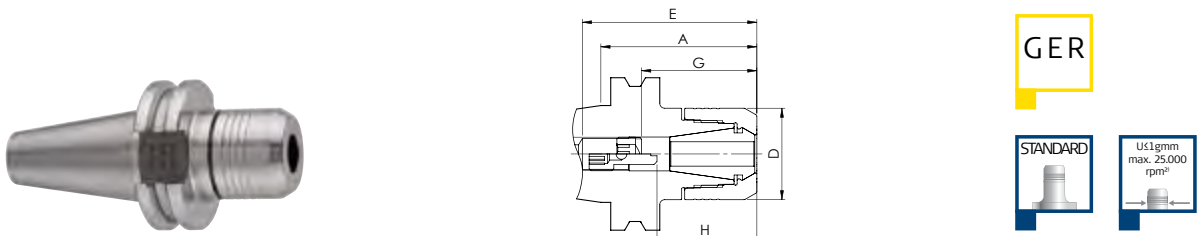


CENTROJP – Version for HPC Clamping Nuts

Description	Order-No.	Form	D	A ¹⁾	max. tool insertion depth without stop	Tool insertion depth with stop				Clamping Range / Collets	Clamping Nuts
						Type U		Type W			
					E	G max.	G min.	H max.	H min.		
CP16-AD30-A=50	44313000500	AD	30	50	56	45	28	31	16	1,0–10,0 GERC16-HP/HPD/GBD	HPC16• HPC16-DI
CP16-AD30-A=100	44313001000			100	98						
CP25-AD30-A=70	44513000700		40	70	63	49	35	31	18	1,0–16,0 GERC25-HP/HPD/GBD	HPC25• HPC25-DI
CP32-AD30-A=70	44613000700		50		75	56	45	40	29	2,0–20,0 GERC32-HP/HPD/GBD	HPC32• HPC32-DI

Accessories: Clamping Nuts pages 60, 62, Wrenches pages 63, 64, Mounting Devices page 64, Precision Collets pages 65 – 67, Tap Collets pages 68, 69, Sealing Discs page 71, Stop Screws page 72, Taper Wipers page 73, Flex-Hone Brushes page 73, Pull Studs page 75

¹⁾ Dimension A applies to Clamping Nuts without Sealing Discs. For Clamping Nuts with Sealing Discs see dimension A¹⁾ under Clamping Nuts on pages 58, 60 and 62
²⁾ Please refer to page 80 onwards regarding the subject of balancing. The max. rpm is depending on the length and the weight of each chuck.


Collet Chucks with Taper Shanks DIN 69871 – AD40|AD/B40



CENTRO|P – Slim Version for HPCM Mini Clamping Nuts

Description	Order-No.	Form	D	A ¹⁾	max. tool in- sertion depth without stop	Tool insertion depth with stop				Clamping Range / Collets	Clamping Nuts
						Type U		Type W			
						G max.	G min.	H max.	H min.		
CP11M-B40-A=70	43214000700	AD/B	16	70	54	32	15	22	7	1,0–7,0 GERC11-HP/HPD	HPC11M• HPC11M-DI
CP11M-B40-A=100	43214001000			100	84	36	18	26	12		
CP11M-B40-A=130	43214001300			130	114	32	15	22	7		
CP11M-B40-A=160	43214001600			160	144	36	18	26	12		
CP16M-B40-A=70	43314000700		22	70	54	50	28	36	14	1,0–10,0 GERC16-HP/HPD/GBD	HPC16MS• HPC16MS-DI
CP16M-B40-A=100	43314001000			100	84						
CP16M-B40-A=130	43314001300			130	114						
CP16M-B40-A=160	43314001600			160	144						

Accessories: Clamping Nuts pages 58, 59, Wrenches pages 63, 64, Mounting Devices page 64, Precision Collets pages 65 – 67, Tap Collets pages 68, 69, Sealing Discs page 71, Stop Screws page 72, Taper Wipers page 73, Flex-Hone Brushes page 73, Pull Studs pages 75, 76



CENTRO|P – Tapered Version for HPCC Special Clamping Nuts



Description	Order-No.	Form	D	A ¹⁾	α	max. tool in- sertion depth without stop	Tool insertion depth with stop				Clamping Range / Collets	Clamping Nuts
							Type U		Type W			
							E	G max.	G min.	H max.		
CPC16-B40-A=100	44314401000	AD/B	24	100	4,5	120	48	28	35	20	1,0–10,0 GERC16-HP/ HPD/GBD	HPC16C• HPC16C-DI
CPC16-B40-A=160	44314401600			160	2,5	120						

Accessories: Clamping Nuts page 59, Wrenches pages 63, 64, Mounting Devices page 64, Precision Collets pages 65 – 67, Tap Collets pages 68, 69, Sealing Discs page 71, Stop Screws page 72, Taper Wipers page 73, Flex-Hone Brushes page 73, Pull Studs pages 75, 76

¹⁾ Dimension A applies to Clamping Nuts without Sealing Discs. For Clamping Nuts with Sealing Discs see dimension A¹⁾ under Clamping Nuts on pages 58 and 59

²⁾ Please refer to page 80 onwards regarding the subject of balancing. The max. rpm is depending on the length and the weight of each chuck.

Collet Chucks with Taper Shanks DIN 69871 – AD40|AD/B40

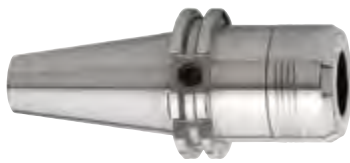

CENTRO|P – Version for HPC Clamping Nuts

Description	Order-No.	Form	D	A ¹⁾	max. tool in- sertion depth without stop	Tool insertion depth with stop				Clamping Range / Collets	Clamping Nuts											
						Type U		Type W														
					E	G max.	G min.	H max.	H min.													
CP16-AD40-A=70	44315000700	AD	30	70	55	45	28	31	16	1,0–10,0 GERC16-HP/HPD/GBD	HPC16• HPC16-DI											
CP16-B40-A=70	44314000700	AD/B		100	85																	
CP16-AD40-A=100	44315001000	AD																				
CP16-B40-A=100	44314001000	AD/B			130	115		50	34			14										
CP16-B40-A=130	44314001300				160	117	45	31	16													
CP16-B40-A=160	44314001600				200	157																
CP16-B40-A=200	44314002000																					
CP20-B40-A=70	44414000700	AD/B	32	70	103	48	31	-	-	1,0–13,0 GERC20-HP/HPD/GBD	HPC20• HPC20-DI											
CP20-B40-A=130	44414001300			130	163																	
CP25-B40-A=45	44514000450	AD/B	40	45	87	60	35	42	20	1,0–16,0 GERC25-HP/HPD/GBD	HPC25• HPC25-DI											
CP25-AD40-A=70	44515000700			70	114							67	38	49	21							
CP25-B40-A=70	44514000700			100												138						
CP25-AD40-A=100	44515001000																					
CP25-B40-A=100	44514001000															130	138	60	35	42	20	
CP25-B40-A=130	44514001300															160	118	60	35	42	20	
CP25-B40-A=160	44514001600															200	148					
CP25-B40-A=200	44514002000																					
CP32-AD40-A=50	44615000500	AD	50	50	84	70	52	52	26	2,0–20,0 GERC32-HP/HPD/GBD	HPC32• HPC32-DI											
CP32-B40-A=50	44614000500	AD/B		70	99																	
CP32-AD40-A=70	44615000700	AD																				
CP32-B40-A=70	44614000700	AD/B			100	114		52	32													
CP32-AD40-A=100	44615001000	AD																				
CP32-B40-A=100	44614001000	AD/B			130	135	74	42	55			28										
CP32-B40-A=130	44614001300				160	135	70															
CP32-B40-A=160	44614001600																					
CP40-AD40-A=70 ²⁾	44715000700		AD	63	70	83	55	48	-	-	3,0–26,0 GERC40-HP/HPD/GBD	HPC40• HPC40-DI										
CP40-AD40-A=100 ²⁾	44715001000	100			62																	


Accessories: Clamping Nuts pages 60, 62, Wrenches pages 63, 64, Mounting Devices page 64, Precision Collets pages 65 – 67, Tap Collets pages 68, 69, Sealing Discs page 71, Stop Screws page 72, Taper Wipers page 73, Flex-Hone Brushes page 73, Pull Studs pages 75, 76

¹⁾ Dimension A applies to Clamping Nuts without Sealing Discs. For Clamping Nuts with Sealing Discs see dimension A¹⁾ under Clamping Nuts on pages 60 and 62

²⁾ Without clearance to DIN 69871 in front of the tool change flange

³⁾ Please refer to page 80 onwards regarding the subject of balancing. The max. rpm is depending on the length and the weight of each chuck.

Collet Chucks with Taper Shanks DIN 69871 – AD40|AD/B40



GOZ
STANDARD

 U₁ 1g/mm
 max. 25.000
 rpm³⁾

CENTRO|P – Version for HPC Clamping Nuts

Description	Order-No.	Form	D	A ¹⁾	max. tool insertion depth		Tool insertion depth with stop				Clamping Range / Collets	Clamping Nuts
					E ²⁾	F ²⁾	G max.	G min.	H max.	H min.		
CP225DG-B40-A=40	48414000400	AD/B	50	40	80	59	65	53	48	37	2,0–25,0 FM25DG•HP	HPC225• HPC225-DIG

Accessories: Clamping Nuts page 61, Wrenches pages 63, 64, Mounting Devices page 64, Precision Collets page 70, Sealing Discs page 71, Stop Screws page 72, Flex-Hone Brushes page 73, Pull Studs pages 75, 76

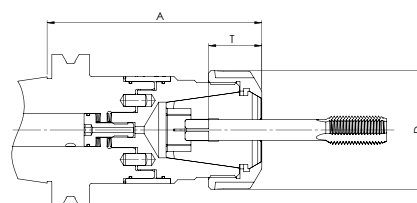
GB

 G 6, 3
 12.000rpm
 or U₁ 1g/mm³⁾

SYNCHRO|T

Description	Order-No.	Form	D	A	Tap insertion depth T				Cutting range	Collets
					Shank-ø 2,8 – 7,1	Shank-ø 8 – 9	Shank-ø 10 – 16	Shank-ø 18 – 25		
ST16-GB-B40-A=79	52314000790	AD/B	30	79	18	22	25	-	M3–M12	GERC16-GBD
ST20-GB-B40-A=80	52414000800		32	80				-	M3–M16	GERC20-GBD
ST25-GB-B40-A=84	52514000840		40	84				-	M3–M20	GERC25-GBD
ST32-GB-B40-A=95	52614000950		50	95				30	M4–M27	GERC32-GBD
ST40-GB-B40-A=120	52714001200		63	120				33	M4–M33	GERC40-GBD


Accessories: Wrenches pages 63, 64, Mounting Devices page 64, Tap Collets pages 68, 69, Taper Wipers page 73, Flex-Hone Brushes page 73, Pull Studs pages 75, 76

¹⁾ Dimension A applies to Clamping Nuts without Sealing Discs. For Clamping Nuts with Sealing Discs see dimension A¹⁾ under Clamping Nuts on page 61

²⁾ Dimension E is for tool shanks ≤ 20 mm and dimension F is for tool shanks > 20 mm

³⁾ Please refer to page 80 onwards regarding the subject of balancing. The max. rpm is depending on the length and the weight of each chuck.



Collet Chucks with Taper Shanks DIN 69871 – AD50|AD/B50



CENTRO|P – Version for HPC Clamping Nuts

Description	Order-No.	Form	D	A ¹⁾	max. tool in- sertion depth without stop	Tool insertion depth with stop				Clamping Range / Collets	Clamping Nuts		
						Type U		Type W					
						G max.	G min.	H max.	H min.				
CP16-AD50-A=70	44317000700	AD	30	70	90	45	28	35	16	1,0–10,0 GERC16-HP/HPD/GBD	HPC16• HPC16-DI		
CP16-AD50-A=100	44317001000			100	120	55		41					
CP16-AD50-A=160	44317001600			160	180								
CP25-AD50-A=70	44517000700		40	70	90	64	35	48	20	1,0–16,0 GERC25-HP/HPD/GBD	HPC25• HPC25-DI		
CP25-AD50-A=100	44517001000			100	120								
CP25-AD50-A=160	44517001600			160	180								
CP32-B50-A=70	44616000700	AD/B	50	70	109	85	59	70	40	2,0–20,0 GERC32-HP/HPD/GBD	HPC32• HPC32-DI		
CP32-B50-A=100	44616001000			100	120	81	53	63	35				
CP32-B50-A=160	44616001600			160	150	83		65					
CP40-AD50-A=70	44717000700	AD	63	70	93	60	48	-	-	3,0–26,0 GERC40-HP/HPD/GBD	HPC40• HPC40-DI		
CP40-AD50-A=100	44717001000			100	96	70							

Accessories: Clamping Nuts pages 60, 62, Wrenches pages 63, 64, Mounting Devices page 64, Precision Collets pages 65 - 67, Tap Collets pages 68, 69, Sealing Discs page 71, Stop Screws page 72, Taper Wipers page 73, Flex-Hone Brushes page 73, Pull Studs pages 75, 76



CENTRO|P – Version for HPC Clamping Nuts


Description	Order-No.	Form	D	A ¹⁾	max. tool insertion depth without stop	Tool insertion depth with stop				Clamping Range / Collets	Clamping Nuts
						Type U		Type W			
					E	G max.	G min.	H max.	H min.		
CP225DG-B50-A=50	48416000500	AD/B	50	50	110	66	55	-	-	2,0–25,0 FM25DG+HP	HPC225• HPC225-DIG
CP432DG-B50-A=50	48716000500		63			70	62	-	-	4,0–32,0 FM32DG	HPC432• HPC432-DIG

Accessories: Clamping Nuts page 61, Wrenches pages 63, 64, Mounting Devices page 64, Precision Collets page 70, Sealing Discs page 71, Stop Screws page 72, Flex-Hone Brushes page 73, Pull Studs pages 75, 76

¹⁾ Dimension A applies to Clamping Nuts without Sealing Discs. For Clamping Nuts with Sealing Discs see dimension A¹⁾ under Clamping Nuts on pages 60, 61 and 62

²⁾ Please refer to page 80 onwards regarding the subject of balancing. The max. rpm is depending on the length and the weight of each chuck.

Collet Chucks with Taper Shanks DIN 69871 – AD50|AD/B50

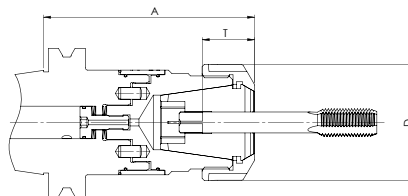

GB
G 6,3
 12.000rpm
 or 151gmm²

SYNCHROIT

Description	Order-No.	Form	D	A	Tap insertion depth T				Cutting range	Collets
					Shank-ø 2,8 – 7,1	Shank-ø 8 – 9	Shank-ø 10 – 16	Shank-ø 18 – 25		
ST16-GB-B50-A=79	52316000790	AD/B	30	79	18	22	25	-	M3–M12	GERC16-GBD
ST20-GB-B50-A=80	52416000800		32	80				-	M3–M16	GERC20-GBD
ST25-GB-B50-A=84	52516000840		40	84				-	M3–M20	GERC25-GBD
ST32-GB-B50-A=95	52616000950		50	95				30	M4–M27	GERC32-GBD
ST40-GB-B50-A=105	52716001050		63	105				33	M4–M33	GERC40-GBD

Accessories: Wrenches pages 63, 64, Mounting Devices page 64, Tap Collets pages 68, 69, Taper Wipers page 73, Flex-Hone Brushes page 73, Pull Studs pages 75, 76

Collet Chucks with Hollow Tapers DIN 69893/ISO 12164 – HSK-A32


GER
MINI
MQL¹⁾

 US1gmm
 max. 50.000
 rpm²⁾

CENTROIP – Slim Version for HPCM Mini Clamping Nuts

Description	Order-No.	Form	D	A ²⁾	max. tool in- sertion depth without stop	Tool insertion depth with stop				Clamping Range / Collets	Clamping Nuts
						Type U		Type W			
					E	G max.	G min.	H max.	H min.		
CP11M-HSK-A32-A=40 ³⁾	43223000400	A	16	40	24	-		-		1,0–7,0 GERC11-HP/HPD	HPC11M• HPC11M-DI
CP16M-HSK-A32-A=50 ³⁾	43323000500		22	50	32					1,0–10,0 GERC16-HP/HPD/GBD	HPC16MS• HPC16MS-DI
CP16M-HSK-A32-A=100	43323001000			100	67	44	27	30	14		

Accessories: Clamping Nuts pages 58, 59, Wrenches pages 63, 64, Mounting Devices page 64, Precision Collets pages 65 – 67, Tap Collets pages 68, 69, Sealing Discs page 71, Stop Screws page 72, Taper Wipers page 73, Flex-Hone Brushes page 73, Coolant Supply Tubes and Wrenches page 74



¹⁾ MQL (minimal quantity lubrication) see page 5

²⁾ Dimension A applies to Clamping Nuts without Sealing Discs. For Clamping Nuts with Sealing Discs see dimension A¹⁾ under Clamping Nuts on pages 58 and 59

³⁾ Extra short version, without stop screw

⁴⁾ Please refer to page 80 onwards regarding the subject of balancing. The max. rpm is depending on the length and the weight of each chuck.

Collet Chucks with Hollow Tapers DIN 69893/ISO 12164 – HSK-A32






CENTRO|P – Version for HPC Clamping Nuts

Description	Order-No.	Form	D	A ²⁾	max. tool insertion depth without stop	Tool insertion depth with stop				Clamping Range / Collets	Clamping Nuts
						Type U		Type W			
					E	G max.	G min.	H max.	H min.		
CP20-HSK-A32-A=50 ³⁾	44423000500	A	32	50	35	-	-	-	-	1,0–13,0 GERC20-HP/HPD/GBD	HPC20• HPC20-DI

Accessories: Clamping Nuts pages 60, 62, Wrenches pages 63, 64, Mounting Devices page 64, Precision Collets pages 65 – 67, Tap Collets pages 68, 69, Sealing Discs page 71, Taper Wipers page 73, Flex-Hone Brushes page 73, Coolant Supply Tubes and Wrenches page 74

Collet Chucks with Hollow Tapers DIN 69893/ISO 12164 – HSK-A40



CENTRO|P – Slim Version for HPCM Mini Clamping Nuts

Description	Order-No.	Form	D	A ²⁾	max. tool in- sertion depth without stop	Tool insertion depth with stop				Clamping Range / Collets	Clamping Nuts
						Type U		Type W			
					E	G max.	G min.	H max.	H min.		
CP11M-HSK-A40-A=60	43224000600	A	16	60	40	24	16	-	-	1,0–7,0	HPC11M•
CP11M-HSK-A40-A=130	43224001300			130	75	32		22	7	GERC11-HP/HPD	HPC11M-DI

Accessories: Clamping Nuts page 58, Wrenches pages 63, 64, Mounting Devices page 64, Precision Collets pages 65, 66, Stop Screws page 72, Taper Wipers page 73, Flex-Hone Brushes page 73, Coolant Supply Tubes and Wrenches page 74



¹⁾ MQL (minimal quantity lubrication) see page 5

²⁾ Dimension A applies to Clamping Nuts without Sealing Discs. For Clamping Nuts with Sealing Discs see dimension A¹⁾ under Clamping Nuts on pages 58, 60 and 62

³⁾ Extra short version, without stop screw

⁴⁾ Please refer to page 80 onwards regarding the subject of balancing. The max. rpm is depending on the length and the weight of each chuck.



Collet Chucks with Hollow Tapers DIN 69893/ISO 12164 – HSK-A40

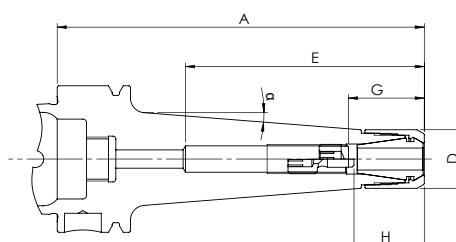

CENTRO|P – Tapered Version for HPCM Mini Clamping Nuts

Description	Order-No.	Form	D	A ²⁾	α	max. tool insertion depth without stop	Tool insertion depth with stop				Clamping Range / Collets	Clamping Nuts
							Type U		Type W			
						E	G max.	G min.	H max.	H min.		
CPC11M-HSK-A40-A=100	43224401000	A	16	100	4,5	65	34	15	25	8	1,0–7,0 GERC11-HP/ HPD	HPC11M• HPC11M-DI

Accessories: Clamping Nuts page 58, Wrenches pages 63, 64, Mounting Devices page 64, Precision Collets pages 65, 66, Stop Screws page 72, Taper Wipers page 73, Flex-Hone Brushes page 73, Coolant Supply Tubes and Wrenches page 74

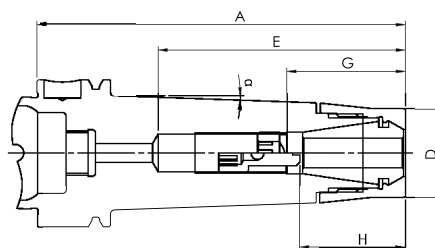

CENTRO|P – Tapered Version for HPCC Special Clamping Nuts

Description	Order-No.	Form	D	A ²⁾	α	max. tool in- sertion depth without stop	Tool insertion depth with stop				Clamping Range / Collets	Clamping Nuts
							Type U		Type W			
							E	G max.	G min.	H max.		
CPC16-HSK-A40-A=60	44324400600	A	24	60	2	43	30	26	-	-	1,0–10,0 GERC16-HP/ HPD/GBD	HPC16C• HPC16C-DI
CPC16-HSK-A40-A=100	44324401000			100		67	47		32	12		

Accessories: Clamping Nuts pages 59, Wrenches pages 63, 64, Mounting Devices page 64, Precision Collets pages 65 – 67, Tap Collets pages 68, 69, Sealing Discs page 71, Stop Screws page 72, Taper Wipers page 73, Flex-Hone Brushes page 73, Coolant Supply Tubes and Wrenches page 74



¹⁾ MQL (minimal quantity lubrication) see page 18

²⁾ Dimension A applies to Clamping Nuts without Sealing Discs. For Clamping Nuts with Sealing Discs see dimension A²⁾ under Clamping Nuts on pages 58 and 59

³⁾ Please refer to page 80 onwards regarding the subject of balancing. The max. rpm is depending on the length and the weight of each chuck.

Collet Chucks with Hollow Tapers



DIN 69893/ISO 12164 – HSK-A40



CENTRO|P – Version for HPC Clamping Nuts

Description	Order-No.	Form	D	A ²⁾	max. tool in- sertion depth without stop	Tool insertion depth with stop				Clamping Range / Collets	Clamping Nuts
						Type U		Type W			
					E	G max.	G min.	H max.	H min.		
CP16-HSK-A40-A=60	44324000600	A	30	60	40	32	28	-	-	1,0–10,0 GERC16-HP/HPD/GBD	HPC16• HPC16-DI
CP25-HSK-A40-A=60 ³⁾	44524000600		40	60		-	-	-	-	1,0–16,0 GERC25-HP/HPD/GBD	HPC25• HPC25-DI
CP25-HSK-A40-A=100	44524001000			100	76	54	32	36	20	2,0–20,0 GERC32-HP/HPD/GBD	HPC32• HPC32-DI
CP32-HSK-A40-A=61 ³⁾	44624000610		50	61	45	-	-	-	-		

Accessories: Clamping Nuts pages 60, 62, Wrenches pages 63, 64, Mounting Devices page 64, Precision Collets pages 65 – 67, Tap Collets pages 68, 69, Sealing Discs page 71, Stop Screws page 72, Taper Wipers page 73, Flex-Hone Brushes page 73, Coolant Supply Tubes and Wrenches page 74

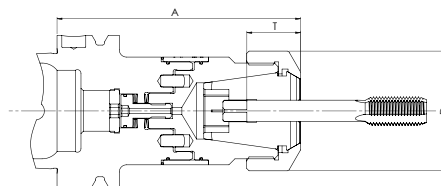

SYNCHRO|T

Description	Order-No.	Form	D	A	Tap insertion depth T				Cutting range	Collets
					Shank-ø 2,8–7,1	Shank-ø 8–9	Shank-ø 10–16	Shank-ø 18–25		
ST16-GB-HSK-A40-A=87	52324000870	A	30	87	18	22	-	-	M3–M12	GERC16-GBD
ST20-GB-HSK-A40-A=88	52424000880		32	88			25	-	M3–M16	GERC20-GBD

Accessories: Wrenches pages 63, 64, Mounting Devices page 64, Tap Collets pages 68, 69, Taper Wipers page 73, Flex-Hone Brushes page 73, Coolant Supply Tubes and Wrenches page 74



¹⁾ MQL (minimal quantity lubrication) see page 5

²⁾ Dimension A applies to Clamping Nuts without Sealing Discs. For Clamping Nuts with Sealing Discs see dimension A¹⁾ under Clamping Nuts on pages 60 and 62

³⁾ Extra short version, without stop screw

⁴⁾ Please refer to page 80 onwards regarding the subject of balancing. The max. rpm is depending on the length and the weight of each chuck.



Collet Chucks with Hollow Tapers DIN 69893/ISO 12164 – HSK-A50

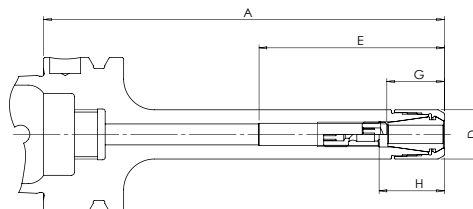

CENTROIP – Slim Version for HPCM Mini Clamping Nuts

Description	Order-No.	Form	D	A ²⁾	max. tool insertion depth without stop	Tool insertion depth with stop				Clamping Range / Collets	Clamping Nuts
						Type U		Type W			
					E	G max.	G min.	H max.	H min.		
CP11M-HSK-A50-A=130	43225001300	A	16	130	60	32	15	22	7	1,0–7,0 GERC11-HP/HPD	HPC11M• HPC11M-DI

Accessories: Clamping Nuts page 58, Wrenches pages 63, 64, Mounting Devices page 64, Precision Collets pages 65, 66, Stop Screws page 72, Taper Wipers page 73, Flex-Hone Brushes page 73, Coolant Supply Tubes and Wrenches page 74

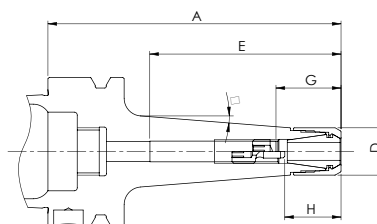

CENTROIP – Tapered Version for HPCM Mini Clamping Nuts

Description	Order-No.	Form	D	A ²⁾	α	max. tool insertion depth without stop	Tool insertion depth with stop				Clamping Range / Collets	Clamping Nuts
							Type U		Type W			
						E	G max.	G min.	H max.	H min.		
CPC11M-HSK-A50-A=100	43225401000	A	16	100	4,5	65	34	15	25	8	1,0–7,0 GERC11-HP/ HPD	HPC11M• HPC11M-DI

Accessories: Clamping Nuts page 58, Wrenches pages 63, 64, Mounting Devices page 64, Precision Collets pages 65, 66, Stop Screws page 72, Taper Wipers page 73, Flex-Hone Brushes page 73, Coolant Supply Tubes and Wrenches page 74



¹⁾ MQL (minimal quantity lubrication) see page 5

²⁾ Dimension A applies to Clamping Nuts without Sealing Discs. For Clamping Nuts with Sealing Discs see dimension A¹⁾ under Clamping Nuts on page 58

³⁾ Please refer to page 80 onwards regarding the subject of balancing. The max. rpm is depending on the length and the weight of each chuck.

Collet Chucks with Hollow Tapers



DIN 69893/ISO 12164 – HSK-A50

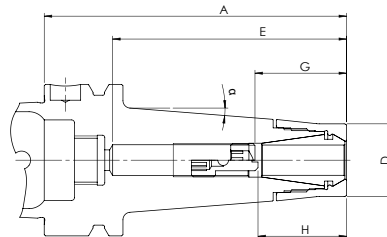

CENTROIP – Tapered Version for HPCC Special Clamping Nuts

Description	Order-No.	Form	D	A ²⁾	α	max. tool in- sertion depth without stop	Tool insertion depth with stop				Clamping Range / Collets	Clamping Nuts
							Type U		Type W			
						E	G max.	G min.	H max.	H min.		
CPC16-HSK-A50-A=65	44325400650	A	24	65	4,5	44	32	28	-	-	1,0–10,0 GERC16-HP/ HPD/GBD	HPC16C• HPC16C-DI
CPC16-HSK-A50-A=100	44325401000			77		38						
CPC16-HSK-A50-A=130	44325401300			130		102		36	14			

Accessories: Clamping Nuts page 59, Wrenches pages 63, 64, Mounting Devices page 64, Precision Collets pages 65 – 67, Tap Collets pages 68, 69, Sealing Discs page 71, Stop Screws page 72, Taper Wipers page 73, Flex-Hone Brushes page 73, Coolant Supply Tubes and Wrenches page 74



CENTROIP – Version for HPC Clamping Nuts

Description	Order-No.	Form	D	A ²⁾	max. tool in- sertion depth without stop	Tool insertion depth with stop				Clamping Range / Collets	Clamping Nuts
						Type U		Type W			
					E	G max.	G min.	H max.	H min.		
CP25-HSK-A50-A=60 ³	44525000600	A	40	60	37	-	-	-	-	1,0–16,0 GERC25-HP/HPD/GBD	HPC25• HPC25-DI
CP25-HSK-A50-A=70	44525000700			70	49	35	34	-	-		
CP25-HSK-A50-A=100	44525001000			100	75	53		35	20		
CP32-HSK-A50-A=70 ³	44625000700		50	70	47	-	-	-	-	2,0–20,0 GERC32-HP/HPD/GBD	HPC32• HPC32-DI

Accessories: Clamping Nuts pages 60, 62, Wrenches pages 63, 64, Mounting Devices page 64, Precision Collets pages 65 – 67, Tap Collets pages 68, 69, Sealing Discs page 71, Stop Screws page 72, Taper Wipers page 73, Flex-Hone Brushes page 73, Coolant Supply Tubes and Wrenches page 74


¹⁾ MQL (minimal quantity lubrication) see page 5

²⁾ Dimension A applies to Clamping Nuts without Sealing Discs. For Clamping Nuts with Sealing Discs see dimension A¹⁾ under Clamping Nuts on pages 59, 60 and 62

³⁾ Extra short version, without stop screw

⁴⁾ Please refer to page 80 onwards regarding the subject of balancing. The max. rpm is depending on the length and the weight of each chuck.

Collet Chucks with Hollow Tapers DIN 69893/ISO 12164 – HSK-A50

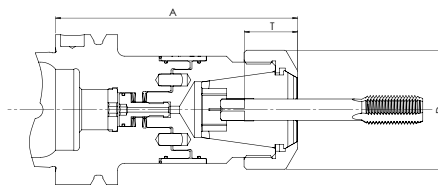
GB


SYNCHRO|T

Description	Order-No.	Form	D	A	Tap insertion depth T				Cutting range	Collets
					Shank-ø 2,8 – 7,1	Shank-ø 8 – 9	Shank-ø 10 – 16	Shank-ø 18 – 25		
ST16-GB-HSK-A50-A=87	52325000870	A	30	87	18	22	-	-	M3–M12	GERC16-GBD
ST20-GB-HSK-A50-A=88	52425000880		32	88			-	-	M3–M16	GERC20-GBD
ST25-GB-HSK-A50-A=92	52525000920		40	92			25	-	M3–M20	GERC25-GBD
ST32-GB-HSK-A50-A=116	52625001160		50	116			-	30	M4–M27	GERC32-GBD



Accessories: Wrenches pages 63, 64, Mounting Devices page 64, Tap Collets pages 68, 69, Taper Wipers page 73, Flex-Hone Brushes page 73, Coolant Supply Tubes and Wrenches page 74

¹⁾ MQL (minimal quantity lubrication) see page 5

²⁾ Please refer to page 80 onwards regarding the subject of balancing. The max. rpm is depending on the length and the weight of each chuck.

Collet Chucks with Hollow Tapers



DIN 69893/ISO 12164 – HSK-A63



CENTRO|P – Slim Version for HPCM Mini Clamping Nuts

Description	Order-No.	Form	D	A ²⁾	max. tool in- sertion depth without stop	Tool insertion depth with stop				Clamping Range / Collets	Clamping Nuts		
						Type U		Type W					
					E	G max.	G min.	H max.	H min.				
CP11M-HSK-A63-A=70	43226000700	A	16	70	48	32	15	22	7	1,0–7,0 GERC11-HP/HPD	HPC11M• HPC11M-DI		
CP11M-HSK-A63-A=100	43226001000			100	78	36	18	26	12				
CP11M-HSK-A63-A=130	43226001300			130	108	32	15	22	7				
CP11M-HSK-A63-A=160	43226001600			160	138	36	18	26	12				
CP16M-HSK-A63-A=70	43326000700		22	70	46	34	27	20	14	1,0–10,0 GERC16-HP/HPD/GBD	HPC16MS• HPC16MS-DI		
CP16M-HSK-A63-A=100	43326001000			100	71	44		30					
CP16M-HSK-A63-A=130	43326001300			130	87	52		38					
CP16M-HSK-A63-A=160	43326001600			160	97								

Accessories: Clamping Nuts pages 58, 59, Wrenches pages 63, 64, Mounting Devices page 64, Precision Collets pages 65 – 67, Tap Collets pages 68, 69, Sealing Discs page 71, Stop Screws page 72, Taper Wipers page 73, Flex-Hone Brushes page 73, Coolant Supply Tubes and Wrenches page 74



CENTRO|P – Tapered Version for HPCC Special Clamping Nuts

Description	Order-No.	Form	D	A ²⁾	α	max. tool in- sertion depth without stop	Tool insertion depth with stop				Clamping Range / Collets	Clamping Nuts
							Type U		Type W			
						E	G max.	G min.	H max.	H min.		
CPC16-HSK-A63-A=100	44326401000	A	24	100	4,5	75	48	28	35	20	1,0–10,0 GERC16-HP/ HPD/GBD	HPC16C• HPC16C-DI
CPC16-HSK-A63-A=160	44326401600			160	2,5	105						

Accessories: Clamping Nuts page 59, Wrenches pages 63, 64, Mounting Devices page 64, Precision Collets pages 65 – 67, Tap Collets pages 68, 69, Sealing Discs page 71, Stop Screws page 72, Taper Wipers page 73, Flex-Hone Brushes page 73, Coolant Supply Tubes and Wrenches page 74



¹⁾ MQL (minimal quantity lubrication) see page 5

²⁾ Dimension A applies to Clamping Nuts without Sealing Discs. For Clamping Nuts with Sealing Discs see dimension A²⁾ under Clamping Nuts on pages 58 and 59

³⁾ Please refer to page 80 onwards regarding the subject of balancing. The max. rpm is depending on the length and the weight of each chuck.

Collet Chucks with Hollow Tapers

DIN 69893/ISO 12164 – HSK-A63



CENTROIP – Version for HPC Clamping Nuts

Description	Order-No.	Form	D	A ²⁾	max. tool in- sertion depth without stop	Tool insertion depth with stop				Clamping Range / Collets	Clamping Nuts		
						Type U		Type W					
						E	G max.	G min.	H max.			H min.	
CP16-HSK-A63-A=55 ³⁾	44326000550	A	30	55	32	-	-	-	-	1,0–10,0 GERC16-HP/HPD/GBD	HPC16• HPC16-DI		
CP16-HSK-A63-A=100	44326001000			100	71	45	28	31	16				
CP16-HSK-A63-A=130	44326001300			130	87	50	26	38	17				
CP16-HSK-A63-A=160	44326001600			160	106	45	28	31	16				
CP16-HSK-A63-A=200	44326002000			200	136								
CP20-HSK-A63-A=60 ³⁾	44426000600		32	60	35	-	-	-	-	1,0–13,0 GERC20-HP/HPD/GBD	HPC20• HPC20-DI		
CP20-HSK-A63-A=100	44426001000			100	70	38	31						
CP25-HSK-A63-A=60 ³⁾	44526000600		40	60	37	-	-	-	-	1,0–16,0 GERC25-HP/HPD/GBD	HPC25• HPC25-DI		
CP25-HSK-A63-A=100	44526001000			100	70	55	35					37	24
CP25-HSK-A63-A=130	44526001300			130	89	60	37					42	12
CP25-HSK-A63-A=160	44526001600			160	128	60	35					42	24
CP25-HSK-A63-A=200	44526002000			200	148								
CP32-HSK-A63-A=70 ³⁾	44626000700		50	70	46	-	-	-	-	2,0–20,0 GERC32-HP/HPD/GBD	HPC32• HPC32-DI		
CP32-HSK-A63-A=100	44626001000			100	71	57	41	39	26				
CP32-HSK-A63-A=130	44626001300			130	101	69	42	41	18				
CP32-HSK-A63-A=160	44626001600			160	129	70	52	60	26				
CP40-HSK-A63-A=80 ³⁾	44726000800		63	80	56	-	-	-	-	3,0–26,0 GERC40-HP/HPD/GBD	HPC40• HPC40-DI		
CP40-HSK-A63-A=160	44726001600			160	130	75	48						

Accessories: Clamping Nuts pages 60, 62, Wrenches pages 63, 64, Mounting Devices page 64, Precision Collets pages 65 – 67, Tap Collets pages 68, 69, Sealing Discs page 71, Stop Screws page 72, Taper Wipers page 73, Flex-Hone Brushes page 73, Coolant Supply Tubes and Wrenches page 74

¹⁾ MQL (minimal quantity lubrication) see page 5


²⁾ Dimension A applies to Clamping Nuts without Sealing Discs. For Clamping Nuts with Sealing Discs see dimension A¹⁾ under Clamping Nuts on pages 60 and 62

³⁾ Extra short version, without stop screw

⁴⁾ Please refer to page 80 onwards regarding the subject of balancing. The max. rpm is depending on the length and the weight of each chuck.

Collet Chucks with Hollow Tapers


DIN 69893/ISO 12164 – HSK-A63



CENTRO|P – Tapered Version for HPC Clamping Nuts

Description	Order-No.	Form	D	A ²⁾	α	max. tool in- sertion depth without stop	Tool insertion depth with stop				Clamping Range / Collets	Clamping Nuts
						E	Type U		Type W			
							G max.	G min.	H max.	H min.		
CPC32-HSK-A63-A=75 ³⁾	44626400750	A	50	75	4	51	-	-	-	-	2,0–20,0 GERC32-HP/ HPD/GBD	HPC32• HPC32-DI

Accessories: Clamping Nuts pages 60, 62, Wrenches pages 63, 64, Mounting Devices page 64, Precision Collets pages 65 – 67, Tap Collets pages 68, 69, Sealing Discs page 71, Taper Wipers page 73, Flex-Hone Brushes page 73, Coolant Supply Tubes and Wrenches page 74



CENTRO|P – Tapered Version for HPC Clamping Nuts

Description	Order-No.	Form	D	A ²⁾	α	max. tool in- sertion depth without stop	Tool insertion depth with stop				Clamping Range / Collets	Clamping Nuts
							Type U		Type W			
						E	G max.	G min.	H max.	H min.		
CPC225DG-HSK-A63- A=85 ³⁾	48426400850	A	50	85	2,5	60	-	-	-	-	2,0–25,0 FM25DG+HP	HPC225• HPC225-DIG

Accessories: Clamping Nuts page 61, Wrenches pages 63, 64, Mounting Devices page 64, Precision Collets page 70, Sealing Discs page 71, Taper Wipers page 73, Flex-Hone Brushes page 73, Coolant Supply Tubes and Wrenches page 74



¹⁾ MQL (minimal quantity lubrication) see page 5

²⁾ Dimension A applies to Clamping Nuts without Sealing Discs. For Clamping Nuts with Sealing Discs see dimension A¹⁾ under Clamping Nuts on pages 60, 61 and 62

³⁾ Extra short version, without stop screw

⁴⁾ Please refer to page 80 onwards regarding the subject of balancing. The max. rpm is depending on the length and the weight of each chuck.



Collet Chucks with Hollow Tapers DIN 69893/ISO 12164 – HSK-A63



CENTRO|P – Version for HPC Clamping Nuts

Description	Order-No.	Form	D	A ²⁾	max. tool insertion depth without stop	Tool insertion depth with stop				Clamping Range / Collets	Clamping Nuts
						Type U		Type W			
					E	G max.	G min.	H max.	H min.		
CP432DG-HSK-A63-A=90 ³⁾	48726000900	A	63	90	67	-	-	-	-	4,0–32,0 FM32DG	HPC432• HPC432-DIG

Accessories: Clamping Nuts page 61, Wrenches pages 63, 64, Mounting Devices page 64, Precision Collets page 70, Sealing Discs page 71, Taper Wipers page 73, Flex-Hone Brushes page 73, Coolant Supply Tubes and Wrenches page 74

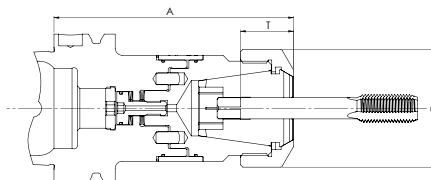

SYNCHRO|T

Description	Order-No.	Form	D	A	Tap insertion depth T				Cutting range	Collets
					Shank-ø 2,8 – 7,1	Shank-ø 8 – 9	Shank-ø 10 – 16	Shank-ø 18 – 25		
ST16-GB-HSK-A63-A=89	52326000890	A	30	89	18	22	25	-	M3–M12	GERC16-GBD
ST20-GB-HSK-A63-A=90	52426000900		32	90				-	M3–M16	GERC20-GBD
ST25-GB-HSK-A63-A=94	52526000940		40	94				-	M3–M20	GERC25-GBD
ST32-GB-HSK-A63-A=105	52626001050		50	105				30	M4–M27	GERC32-GBD
ST40-GB-HSK-A63-A=134	52726001340		63	134				33	M4–M33	GERC40-GBD

Accessories: Wrenches pages 63, 64, Mounting Devices page 64, Tap Collets pages 68, 69, Taper Wipers page 73, Flex-Hone Brushes page 73, Coolant Supply Tubes and Wrenches page 74




¹⁾ MQL (minimal quantity lubrication) see page 5

²⁾ Dimension A applies to Clamping Nuts without Sealing Discs. For Clamping Nuts with Sealing Discs see dimension A¹⁾ under Clamping Nuts on page 61

³⁾ Extra short version, without stop screw

⁴⁾ Please refer to page 80 onwards regarding the subject of balancing. The max. rpm is depending on the length and the weight of each chuck.



Collet Chucks with Hollow Tapers DIN 69893/ISO 12164 – HSK-A80



CENTRO|P – Version for HPC Clamping Nuts

Description	Order-No.	Form	D	A ²⁾	max. tool in- sertion depth without stop	Tool insertion depth with stop				Clamping Range / Collets	Clamping Nuts
					E	Type U		Type W			
						G max.	G min.	H max.	H min.		
CP32-HSK-A80-A=100	44627001000	A	50	100	70	55	48	-	-	2,0–20,0 GERC32-HP/HPD/GBD	HPC32• HPC32-DI
CP40-HSK-A80-A=120	44727001200		63	120	86	54	35	-	-	3,0–26,0 GERC40-HP/HPD/GBD	HPC40• HPC40-DI

Accessories: Clamping Nuts pages 60, 62, Wrenches pages 63, 64, Mounting Devices page 64, Precision Collets pages 65 – 67, Tap Collets pages 68, 69, Sealing Discs page 71, Stop Screws page 72, Taper Wipers page 73, Flex-Hone Brushes page 73, Coolant Supply Tubes and Wrenches page 74

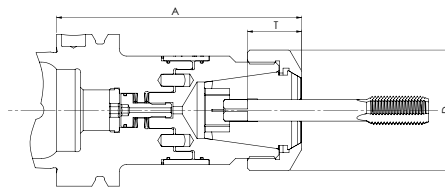

SYNCHRO|T

Description	Order-No.	Form	D	A	Tap insertion depth T				Cutting range	Collets
					Shank-ø 2,8–7,1	Shank-ø 8–9	Shank-ø 10–16	Shank-ø 18–25		
ST32-GB-HSK-A80-A=111	52627001110	A	50	111	18	22	25	30	M4–M27	GERC32-GBD
ST40-GB-HSK-A80-A=131	52727001310		63	131				33	M4–M33	GERC40-GBD




Accessories: Wrenches pages 63, 64, Mounting Devices page 64, Tap Collets pages 68, 69, Taper Wipers page 73, Flex-Hone Brushes page 73, Coolant Supply Tubes and Wrenches page 74

¹⁾ MQL (minimal quantity lubrication) see page 5

²⁾ Dimension A applies to Clamping Nuts without Sealing Discs. For Clamping Nuts with Sealing Discs see dimension A¹⁾ under Clamping Nuts on pages 60 and 62

³⁾ Please refer to page 80 onwards regarding the subject of balancing. The max. rpm is depending on the length and the weight of each chuck.



Collet Chucks with Hollow Tapers DIN 69893/ISO 12164 – HSK-A100



CENTROIP GER – Version for HPC Clamping Nuts

Description	Order-No.	Form	D	A ²⁾	max. tool in- sertion depth without stop	Tool insertion depth with stop				Clamping Range / Collets	Clamping Nuts
						Type U		Type W			
						E	G max.	G min.	H max.		
CP16-HSK-A100-A=100	44328001000	A	30	100	70	48	28	35	16	1,0–10,0 GERC16-HP/HPD/GBD	HPC16• HPC16-DI
CP16-HSK-A100-A=160	44328001600			160	130						
CP25-HSK-A100-A=100	44528001000		40	100	71	56	38	40	20	1,0–16,0 GERC25-HP/HPD/GBD	HPC25• HPC25-DI
CP25-HSK-A100-A=160	44528001600			160	105						
CP32-HSK-A100-A=100	44628001000		50	100	70	59	42	40	24	2,0–20,0 GERC32-HP/HPD/GBD	HPC32• HPC32-DI
CP32-HSK-A100-A=160	44628001600			160	99						
CP32-HSK-A100-A=200	44628002000			200	150						
CP40-HSK-A100-A=100 ³⁾	44728001000		63	100	65	-	-	-	-	3,0–26,0 GERC40-HP/HPD/GBD	HPC40• HPC40-DI

Accessories: Clamping Nuts pages 60, 62, Wrenches pages 63, 64, Mounting Devices page 64, Precision Collets pages 65 - 67, Tap Collets pages 68, 69, Sealing Discs page 71, Stop Screws page 72, Taper Wipers page 73, Flex-Hone Brushes page 73, Coolant Supply Tubes and Wrenches page 74



CENTROIP – Tapered Version for HPC Clamping Nuts

Description	Order-No.	Form	D	A ²⁾	max. tool insertion depth without stop	Tool insertion depth with stop				Clamping Range / Collets	Clamping Nuts
						Type U		Type W			
					E	G max.	G min.	H max.	H min.		
CPC225DG-HSK-A100-A=90 ³⁾	48428400900	A	50	90	60	-	-	-	-	2,0–25,0 FM25DG•HP	HPC225• HPC225-DIG
CPC432DG-HSK-A100-A=100 ³⁾	48728401000		63	100	69	-	-	-	-	4,0–32,0 FM32DG	HPC432• HPC432-DIG

Accessories: Clamping Nuts page 61, Wrenches pages 63, 64, Mounting Devices page 64, Precision Collets page 70, Sealing Discs page 71, Taper Wipers page 73, Flex-Hone Brushes page 73, Coolant Supply Tubes and Wrenches page 74


¹⁾ MQL (minimal quantity lubrication) see page 5

²⁾ Dimension A applies to Clamping Nuts without Sealing Discs. For Clamping Nuts with Sealing Discs see dimension A¹⁾ under Clamping Nuts on pages 60, 61 and 62

³⁾ Extra short version, without stop screw

⁴⁾ Please refer to page 80 onwards regarding the subject of balancing. The max. rpm is depending on the length and the weight of each chuck.

Collet Chucks with Hollow Tapers DIN 69893/ISO 12164 – HSK-A100

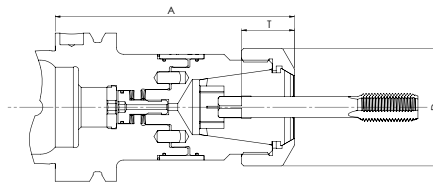

GB




SYNCHRO|T

Description	Order-No.	Form	D	A	Tap insertion depth T				Cutting range	Collets
					Shank-ø 2,8 – 7,1	Shank-ø 8 – 9	Shank-ø 10 – 16	Shank-ø 18 – 25		
ST16-GB-HSK-A100-A=95	52328000950	A	30	95	18	22	25	-	M3–M12	GERC16-GBD
ST20-GB-HSK-A100-A=97	52428000970		32	97				-	M3–M16	GERC20-GBD
ST25-GB-HSK-A100-A=101	52528001010		40	101				-	M3–M20	GERC25-GBD
ST32-GB-HSK-A100-A=110	52628001100		50	110				30	M4–M27	GERC32-GBD
ST40-GB-HSK-A100-A=133	52728001330		63	133				33	M4–M33	GERC40-GBD

Accessories: Wrenches pages 63, 64, Mounting Devices page 64, Tap Collets pages 68, 69, Taper Wipers page 73, Flex-Hone Brushes page 73, Coolant Supply Tubes and Wrenches page 74

Collet Chucks with Hollow Tapers DIN 69893 – HSK-E25

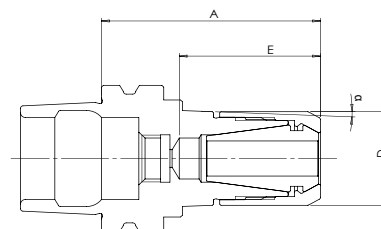

GER



CENTRO|P – Tapered Version for HPCM Mini Clamping Nuts

Description	Order-No.	Form	D	A 2)	α	max. tool insertion depth without stop	Tool insertion depth with stop				Clamping Range / Collets	Clamping Nuts
							Type U		Type W			
						E	G max.	G min.	H max.	H min.		
CPC8M-HSK-E25-A=35 ³⁾	43142000350	E	10	35	-	16	-	-	-	-	1,0–5,0 GERC8-HP	HPC8M
CPC11M-HSK-E25-A=35 ³⁾	43242000350		16		2,5	22					1,0–7,0 GERC11-HP/HPD	HPC11M• HPC11M-D
CPC16M-HSK-E25-A=45 ³⁾	43342000450		22	45	-	30					1,0–10,0 GERC16-HP/HPD/GBD	HPC16MS• HPC16MS-D

Accessories: Clamping Nuts pages 58, 59, Wrenches pages 63, 64, Mounting Devices page 64, Precision Collets pages 65 – 67, Tap Collets pages 68, 69, Sealing Discs page 71, Taper Wipers page 73, Flex-Hone Brushes page 73, Coolant Supply Tubes and Wrenches page 74

¹⁾ MQL (minimal quantity lubrication) see page 5


²⁾ Dimension A applies to Clamping Nuts without Sealing Discs. For Clamping Nuts with Sealing Discs see dimension A¹⁾ under Clamping Nuts on pages 58 and 59

³⁾ Extra short version, without stop screw

⁴⁾ Please refer to page 80 onwards regarding the subject of balancing. The max. rpm is depending on the length and the weight of each chuck.

Collet Chucks with Hollow Tapers

DIN 69893 – HSK-E32

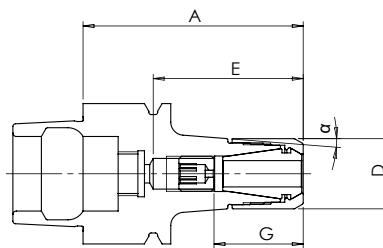

CENTROJP – Tapered Version for HPCM Mini Clamping Nuts

Description	Order-No.	Form	D	A ²⁾	α	max. tool in- sertion depth without stop	Tool insertion depth with stop				Clamping Range / Collets	Clamping Nuts
							Type U		Type W			
							E	G max.	G min.	H max.		
CP8M-HSK-E32-A=50 ³⁾	43143000500	E	10	50	-	30	-	-			1,0–5,0 GERC8-HP	HPC8M
CPC11M-HSK-E32-A=50	43243000500		16			31	20	18	-	-	1,0–7,0 GERC11-HP/ HPD	HPC11M• HPC11M-DI
CPC16M-HSK-E32-A=55	43343000550		22	55	4,5	40	32	28	22	12	1,0–10,0 GERC16-HP/ HPD/GBD	HPC16MS• HPC16MS-DI

Accessories: Clamping Nuts pages 58, 59, Wrenches pages 63, 64, Mounting Devices page 64, Precision Collets pages 65 – 67, Tap Collets pages 68, 69, Sealing Discs page 71, Stop Screws page 72, Taper Wipers page 73, Flex-Hone Brushes page 73, Coolant Supply Tubes and Wrenches page 74



¹⁾ MQL (minimal quantity lubrication) see page 5

²⁾ Dimension A applies to Clamping Nuts without Sealing Discs. For Clamping Nuts with Sealing Discs see dimension A¹⁾ under Clamping Nuts on pages 58 and 59

³⁾ Extra short version, without stop screw

⁴⁾ Please refer to page 80 onwards regarding the subject of balancing. The max. rpm is depending on the length and the weight of each chuck.



Collet Chucks with Hollow Tapers DIN 69893 – HSK-E40

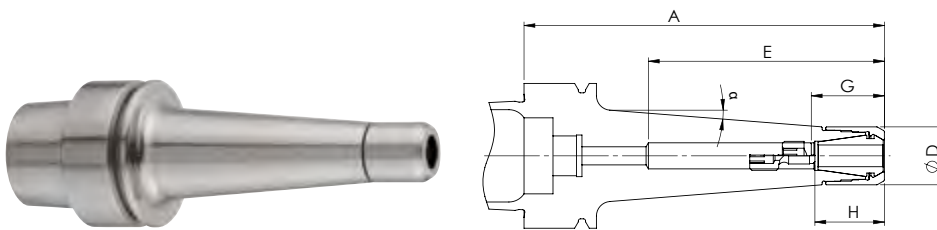

CENTRO|P – Tapered Version for HPCM Mini Clamping Nuts

Description	Order-No.	Form	D	A ²⁾	α	max. tool in- sertion depth without stop	Tool insertion depth with stop				Clamping Range / Collets	Clamping Nuts
							Type U		Type W			
							E max.	G min.	H max.	H min.		
CPC11M-HSK-E40-A=50	43244000500	E	16	50	4,5	31	20	18	-	-	1,0-7,0 GERC11-HP/ HPD	HPC11M• HPC11M-DI
CPC11M-HSK-E40-A=100	43244001000			100		64	36		26	12		
CPC11M-HSK-E40-A=130	43244001300			130		65	33	19	23	13		
CPC11M-HSK-E40-A=160	43244001600			160								
CPC16M-HSK-E40-A=55	43344000550		22	55	2,5	38	30	28	20	12	1,0-10,0 GERC16-HP/ HPD/GBD	HPC16MS• HPC16MS-DI
CPC16M-HSK-E40-A=100	43344001000			100		66	48		38			

Accessories: Clamping Nuts pages 58, 59, Wrenches pages 63, 64, Mounting Devices page 64, Precision Collets pages 65 – 67, Tap Collets pages 68, 69, Sealing Discs page 71, Stop Screws page 72, Taper Wipers page 73, Flex-Hone Brushes page 73, Coolant Supply Tubes and Wrenches page 74

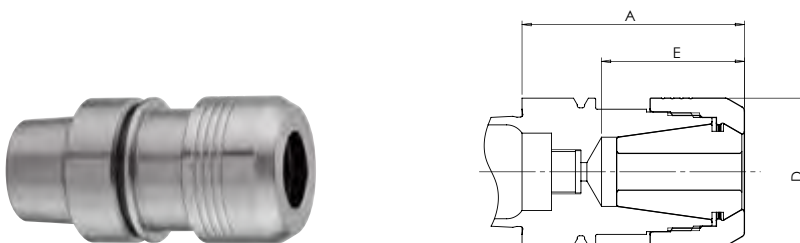

CENTRO|P – Version for HPC Clamping Nuts

Description	Order-No.	Form	D	A ²⁾	max. tool insertion depth without stop	Tool insertion depth with stop				Clamping Range / Collets	Clamping Nuts
						Type U		Type W			
					E	G max.	G min.	H max.	H min.		
CP25-HSK-E40-A=60 ³⁾	44544000600	E	40	60	39	-	-	-	-	1,0-16,0 GERC25-HP/HPD/GBD	HPC25• HPC25-DI

Accessories: Clamping Nuts pages 60, 62, Wrenches pages 63, 64, Mounting Devices page 64, Precision Collets pages 65 – 67, Tap Collets pages 68, 69, Sealing Discs page 71, Taper Wipers page 73, Flex-Hone Brushes page 73, Coolant Supply Tubes and Wrenches page 74


¹⁾ MQL (minimal quantity lubrication) see page 5

²⁾ Dimension A applies to Clamping Nuts without Sealing Discs. For Clamping Nuts with Sealing Discs see dimension A¹⁾ under Clamping Nuts on pages 58, 59, 60 and 62

³⁾ Extra short version, without stop screw

⁴⁾ Please refer to page 80 onwards regarding the subject of balancing. The max. rpm is depending on the length and the weight of each chuck.


Collet Chucks with Hollow Tapers DIN 69893 – HSK-E50

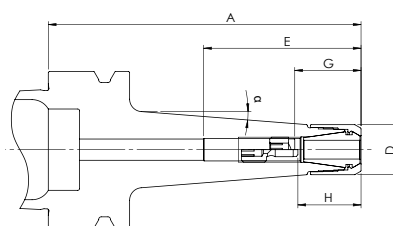

CENTRO|P – Tapered Version for HPCM Mini Clamping Nuts

Description	Order-No.	Form	D	A ²⁾	α	max. tool insertion depth without stop	Tool insertion depth with stop				Clamping Range / Collets	Clamping Nuts
							Type U		Type W			
							E	G max.	G min.	H max.		
CPC11M-HSK-E50-A=60	43245000600	E	16	60	4,5	37	23	15	-	-	1,0–7,0 GERC11-HP/ HPD	HPC11M• HPC11M-DI
CPC11M-HSK-E50-A=100	43245001000			100		50	30		21	10		
CPC16M-HSK-E50-A=60	43345000600		22	60	2,5	39	31	28	21	12	1,0–10,0 GERC16-HP/ HPD/GBD	HPC16MS• HPC16MS-DI
CPC16M-HSK-E50-A=100	43345001000			100		72	48		35			

Accessories: Clamping Nuts pages 58, 59, Wrenches pages 63, 64, Mounting Devices page 64, Precision Collets pages 65 – 67, Tap Collets pages 68, 69, Sealing Discs page 71, Stop Screws page 72, Taper Wipers page 73, Flex-Hone Brushes page 73, Coolant Supply Tubes and Wrenches page 74



CENTRO|P – Version for HPC Clamping Nuts

Description	Order-No.	Form	D	A ²⁾	max. tool in- sertion depth without stop	Tool insertion depth with stop				Clamping Range / Collets	Clamping Nuts
					E	Type U		Type W			
						G max.	G min.	H max.	H min.		
CP25-HSK-E50-A=70 ³⁾	44545000700	E	40	70	49	39	30	-	-	1,0–16,0 GERC25-HP/HPD/GBD	HPC25• HPC25-DI

Accessories: Clamping Nuts pages 60, 62, Wrenches pages 63, 64, Mounting Devices page 64, Precision Collets pages 65 – 67, Tap Collets pages 68, 69, Sealing Discs page 71, Stop Screws page 72, Taper Wipers page 73, Flex-Hone Brushes page 73, Coolant Supply Tubes and Wrenches page 74

¹⁾ MQL (minimal quantity lubrication) see page 5


²⁾ Dimension A applies to Clamping Nuts without Sealing Discs. For Clamping Nuts with Sealing Discs see dimension A¹⁾ under Clamping Nuts on pages 58, 59, 60 and 62

³⁾ Only stop screw AS-CP16-U (thread M11x1) possible

⁴⁾ Extra short version, without stop screw

⁵⁾ Please refer to page 80 onwards regarding the subject of balancing. The max. rpm is depending on the length and the weight of each chuck.

Collet Chucks with Hollow Tapers DIN69893 – HSK-E63




CENTRO|P – Version for HPC Clamping Nuts

Description	Order-No.	Form	D	A ²⁾	max. tool in- sertion depth without stop	Tool insertion depth with stop				Clamping Range / Collets	Clamping Nuts
						Type U		Type W			
					E	G max.	G min.	H max.	H min.		
CP32-HSK-E63-A=70 ⁴⁾	44646000700	E	50	70	47	-	-	-	-	2,0–20,0 GERC32-HP/HPD/GBD	HPC32• HPC32-DI

Accessories: Clamping Nuts pages 60, 62, Wrenches pages 63, 64, Mounting Devices page 64, Precision Collets pages 65 - 67, Tap Collets pages 68, 69, Sealing Discs page 71, Taper Wipers page 73, Flex-Hone Brushes page 73, Coolant Supply Tubes and Wrenches page 74

Collet Chucks with Hollow Tapers DIN69893 – HSK-F50



CENTRO|P – Version for HPC Clamping Nuts

Description	Order-No.	Form	D	A ²⁾	max. tool in- sertion depth without stop	Tool insertion depth with stop				Clamping Range / Collets	Clamping Nuts
						Type U		Type W			
					E	G max.	G min.	H max.	H min.		
CP25-HSK-F50-A=55 ³⁾	44585000550	F	40	55	38	-	-	-	-	1,0–16,0 GERC25-HP/HPD/GBD	HPC25• HPC25-DI

Accessories: Clamping Nuts pages 60, 62, Wrenches pages 63, 64, Mounting Devices page 64, Precision Collets pages 65 - 67, Tap Collets pages 68, 69, Sealing Discs page 71, Taper Wipers page 73, Flex-Hone Brushes page 73


¹⁾ MQL (minimal quantity lubrication) see page 5

²⁾ Dimension A applies to Clamping Nuts without Sealing Discs. For Clamping Nuts with Sealing Discs see dimension A¹⁾ under Clamping Nuts on pages 60 and 62

³⁾ Extra short version, without stop screw

⁴⁾ Please refer to page 80 onwards regarding the subject of balancing. The max. rpm is depending on the length and the weight of each chuck.


Collet Chucks with Hollow Tapers DIN 69893 – HSK-F63



CENTRO|P – Version for HPC Clamping Nuts

Description	Order-No.	Form	D	A ¹⁾	max. tool in- sertion depth without stop	Tool insertion depth with stop				Clamping Range / Collets	Clamping Nuts
						Type U		Type W			
					E	G max.	G min.	H max.	H min.		
CP16-HSK-F63-A=100	44386001000	F	30	100	70	47	30	33	16	1,0–10,0 GERC16-HP/HPD/GBD	HPC16• HPC16-DI
CP25-HSK-F63-A=100	44586001000		40			52	38	34	20	1,0–16,0 GERC25-HP/HPD/GBD	HPC25• HPC25-DI
CP32-HSK-F63-A=65 ²⁾	44686000650		50	65	39	-	-	-	-	2,0–20,0	HPC32•
CP32-HSK-F63-A=100	44686001000		50	100	70	54	41	36	22	GERC32-HP/HPD/GBD	HPC32-DI

Accessories: Clamping Nuts pages 60, 62, Wrenches pages 63, 64, Mounting Devices page 64, Precision Collets pages 65 - 67, Tap Collets pages 68, 69, Sealing Discs page 71, Taper Wipers page 73, Flex-Hone Brushes page 73




CENTRO|P – Version for HPC Clamping Nuts

Description	Order-No.	Form	D	A ¹⁾	max. tool insertion depth without stop	Tool insertion depth with stop				Clamping Range / Collets	Clamping Nuts
						Type U		Type W			
					E	G max.	G min.	H max.	H min.		
CP225DG-HSK-F63-A=75 ²⁾	48486000750	F	50	75	56	-	-	-	-	2,0–25,0 FM25DG-HP	HPC225• HPC225-DIG

Accessories: Clamping Nuts pages 61, Wrenches pages 63, 64, Mounting Devices page 64, Precision Collets page 70, Sealing Discs page 71, Taper Wipers page 73, Flex-Hone Brushes page 73

¹⁾ Dimension A applies to Clamping Nuts without Sealing Discs. For Clamping Nuts with Sealing Discs see dimension A¹⁾ under Clamping Nuts on pages 60, 61 and 62
²⁾ Extra short version, without stop screw
³⁾ Please refer to page 80 onwards regarding the subject of balancing. The max. rpm is depending on the length and the weight of each chuck.


Collet Chucks with Polygonal Shank ISO 26623-1 – C3 (AD)



CENTRO|P – Slim Version for HPCM Mini Clamping Nuts

Description	Order-No.	Form	D	A ¹⁾	max. tool insertion depth without stop	Tool insertion depth with stop				Clamping Range / Collets	Clamping Nuts
						Type U		Type W			
					E ³⁾	G max.	G min.	H max.	H min.		
CP16M-C3-A=45 ²⁾	43353000450	AD	22	45	45	-	-	-	-	1,0-10,0 GERC16-HP/HPD/GBD	HPC16MS• HPC16MS-DI

Accessories: Clamping Nuts pages 58, 59, Wrenches pages 63, 64, Mounting Devices page 64, Precision Collets pages 65 - 67, Tap Collets pages 68, 69, Sealing Discs page 71, Taper Wipers page 73, Flex-Hone Brushes page 73



CENTRO|P – Version for HPC Clamping Nuts

Description	Order-No.	Form	D	A ¹⁾	max. tool insertion depth without stop	Tool insertion depth with stop				Clamping Range / Collets	Clamping Nuts
						Type U		Type W			
					E ³⁾	G max.	G min.	H max.	H min.		
CP20-C3-A=45 ²⁾	44453000450	AD	32	45	36	-	-	-	-	1,0-13,0 GERC20-HP/HPD/GBD	HPC20• HPC20-DI

Accessories: Clamping Nuts pages 60, 62, Wrenches pages 63, 64, Mounting Devices page 64, Precision Collets pages 65 - 67, Tap Collets pages 68, 69, Sealing Discs page 71, Taper Wipers page 73, Flex-Hone Brushes page 73


¹⁾ Dimension A applies to Clamping Nuts without Sealing Discs. For Clamping Nuts with Sealing Discs see dimension A¹⁾ under Clamping Nuts on pages 59, 60 and 62

²⁾ Extra short version, without stop screw

³⁾ With the thread M12x1,5 stated by the ISO standard 26613-1, cutting tools with shank diameters up to 10 mm can be inserted deeper in interface C3 as mentioned at dimension E in the chart.

⁴⁾ Please refer to page 80 onwards regarding the subject of balancing. The max. rpm is depending on the length and the weight of each chuck.

Collet Chucks with Polygonal Shank ISO 26623-1 – C₄ (AD)



CENTROIP – Version for HPC Clamping Nuts

Description	Order-No.	Form	D	A ¹⁾	max. tool in- sertion depth without stop	Tool insertion depth with stop				Clamping Range / Collets	Clamping Nuts
						Type U		Type W			
					E ³⁾	G max.	G min.	H max.	H min.		
CP16-C4-A=55	44354000550	AD	30	55	47	38	29	-	-	1,0–10,0 GERC16-HP/HPD/GBD	HPC16• HPC16-DI
CP20-C4-A=55 ²⁾	44454000550		32		44	-	-	-	-	1,0–13,0 GERC20-HP/HPD/GBD	HPC20• HPC20-DI
CP25-C4-A=52 ²⁾	44554000520		40	52	47	-	-	-	-	1,0–16,0 GERC25-HP/HPD/GBD	HPC25• HPC25-DI
CP32-C4-A=54 ²⁾	44654000540		50	54	50	-	-	-	-	2,0–20,0 GERC32-HP/HPD/GBD	HPC32• HPC32-DI

Accessories: Clamping Nuts pages 60, 62, Wrenches pages 63, 64, Mounting Devices page 64, Precision Collets pages 65 – 67, Tap Collets pages 68, 69, Sealing Discs page 71, Stop Screws page 72, Taper Wipers page 73, Flex-Hone Brushes page 73


¹⁾ Dimension A applies to Clamping Nuts without Sealing Discs. For Clamping Nuts with Sealing Discs see dimension A¹⁾ under Clamping Nuts on pages 60 and 62

²⁾ Extra short version, without stop screw

³⁾ With the thread M14x1,5 stated by the ISO standard 26613-1, cutting tools with shank diameters up to 12 mm can be inserted deeper in interface C₄ as mentioned at dimension E in the chart.

⁴⁾ Please refer to page 80 onwards regarding the subject of balancing. The max. rpm is depending on the length and the weight of each chuck.


Collet Chucks with Polygonal Shank ISO 26623-1 – C5 (AD)

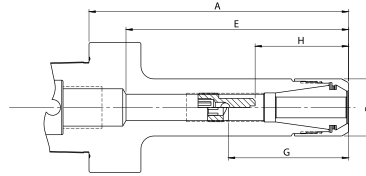

CENTROIP – Slim Version for HPCM Mini Clamping Nuts

Description	Order-No.	Form	D	A ¹⁾	max. tool insertion depth without stop	Tool insertion depth with stop				Clamping Range / Collets	Clamping Nuts
						Type U		Type W			
					E ³⁾	G max.	G min.	H max.	H min.		
CP16M-C5-A=100	43355001000	AD	22	100	87	50	30	36	30	1,0-10,0 GERC16-HP/HPD/GBD	HPC16MS• HPC16MS-DI

Accessories: Clamping Nuts pages 58, 59, Wrenches pages 63, 64, Mounting Devices page 64, Precision Collets pages 65 – 67, Tap Collets pages 68, 69, Sealing Discs page 71, Stop Screws page 72, Taper Wipers page 73, Flex-Hone Brushes page 73



CENTROIP – Version for HPC Clamping Nuts

Description	Order-No.	Form	D	A ¹⁾	max. tool insertion depth without stop	Tool insertion depth with stop				Clamping Range / Collets	Clamping Nuts
						Type U		Type W			
						E ²⁾	G max.	G min.	H max.		
CP16-C5-A=60	44355000600	AD	30	60	47	38	29	-	-	1,0–10,0	HPC16•
CP16-C5-A=100	44355001000			100	87	51		37	29	GERC16-HP/HPD/GBD	HPC16-DI
CP20-C5-A=60 ²⁾	44455000600		32	60	47	-	-	-	-	1,0–13,0	HPC20•
CP25-C5-A=60 ²⁾	44555000600				48	-	-	-	-	GERC20-HP/HPD/GBD	HPC20-DI
CP32-C5-A=60 ²⁾	44655000600		50		49	-	-	-	-	2,0–20,0	HPC32•
										GERC25-HP/HPD/GBD	HPC25-DI
										GERC32-HP/HPD/GBD	HPC32-DI

Accessories: Clamping Nuts pages 60, 62, Wrenches pages 63, 64, Mounting Devices page 64, Precision Collets pages 65 – 67, Tap Collets pages 68, 69, Sealing Discs page 71, Stop Screws page 72, Taper Wipers page 73, Flex-Hone Brushes page 73


¹⁾ Dimension A applies to Clamping Nuts without Sealing Discs. For Clamping Nuts with Sealing Discs see dimension A¹⁾ under Clamping Nuts on pages 59, 60 and 62

²⁾ Extra short version, without stop screw

³⁾ With the thread M16x1,5 stated by the ISO standard 26613-1, cutting tools with shank diameters up to 14 mm can be inserted deeper in interface C5 as mentioned at dimension E in the chart.

⁴⁾ Please refer to page 80 onwards regarding the subject of balancing. The max. rpm is depending on the length and the weight of each chuck.

Collet Chucks with Polygonal Shank ISO 26623-1 – C6 (AD)



CENTROJP – Version for HPC Clamping Nuts

Description	Order-No.	Form	D	A ¹⁾	max. tool in- sertion depth without stop	Tool insertion depth with stop				Clamping Range / Collets	Clamping Nuts
						Type U		Type W			
				E ³⁾	G max.	G min.	H max.	H min.			
CP16-C6-A=60 ²⁾	44356000600	AD	30	60	44	-	-	-	-	1,0–10,0	HPC16•
CP16-C6-A=100	44356001000			100	83	53	29	39	25	GERC16-HP/HPD/GBD	HPC16-DI
CP20-C6-A=60 ²⁾	44456000600		32	60	44	-	-	-	-	1,0–13,0	HPC20•
CP20-C6-A=100	44456001000			100	84	59	33			GERC20-HP/HPD/GBD	HPC20-DI
CP25-C6-A=60 ²⁾	44556000600		40	60	38	-	-	30	1,0–16,0 GERC25-HP/HPD/GBD	HPC25• HPC25-DI	
CP25-C6-A=100	44556001000			100	78	62	36				45
CP25-C6-A=130	44556001300			130	99	70	34				50
CP25-C6-A=160	44556001600			160	118						
CP32-C6-A=60 ²⁾	44656000600		50	60	42	-	-	-	-	2,0–20,0 GERC32-HP/HPD/GBD	HPC32• HPC32-DI
CP32-C6-A=100	44656001000			100	79	63	45	45	25		
CP32-C6-A=130	44656001300			130	99	65		53			
CP40-C6-A=65 ²⁾	44756000650		63	65	51	-	-	-	-	3,0–26,0	HPC40•
CP40-C6-A=100	44756001000			100	86	46	50			GERC40-HP/HPD/GBD	HPC40-DI

Accessories: Clamping Nuts pages 60, 62, Wrenches pages 63, 64, Mounting Devices page 64, Precision Collets pages 65 – 67, Tap Collets pages 68, 69, Sealing Discs page 71, Stop Screws page 72, Taper Wipers page 73, Flex-Hone Brushes page 73


¹⁾ Dimension A applies to Clamping Nuts without Sealing Discs. For Clamping Nuts with Sealing Discs see dimension A¹⁾ under Clamping Nuts on pages 60 and 62

²⁾ Extra short version, without stop screw

³⁾ With the thread M20x2 stated by the ISO standard 26613-1, cutting tools with shank diameters up to 18 mm can be inserted deeper in interface C6 as mentioned at dimension E in the chart.

⁴⁾ Please refer to page 80 onwards regarding the subject of balancing. The max. rpm is depending on the length and the weight of each chuck.

Collet Chucks with Polygonal Shank ISO 26623-1 – C8 (AD)



CENTRO|P – Version for HPC Clamping Nuts

Description	Order-No.	Form	D	A ¹⁾	max. tool in- sertion depth without stop	Tool insertion depth with stop				Clamping Range / Collets	Clamping Nuts
						Type U		Type W			
					E ²⁾	G max.	G min.	H max.	H min.		
CP32-C8-A=100	44658001000	AD	50	100	86	63	41	45	27	2,0–20,0 GERC32-HP/HPD/GBD	HPC32• HPC32-DI
CP40-C8-A=100	44758001000		63			55	47	-	-	3,0–26,0 GERC40-HP/HPD/GBD	HPC40• HPC40-DI


Accessories: Clamping Nuts pages 60, 62, Wrenches pages 63, 64, Mounting Devices page 64, Precision Collets pages 65 – 67, Tap Collets pages 68, 69, Sealing Discs page 71, Stop Screws page 72, Taper Wipers page 73, Flex-Hone Brushes page 73

¹⁾ Dimension A applies to Clamping Nuts without Sealing Discs. For Clamping Nuts with Sealing Discs see dimension A¹⁾ under Clamping Nuts on pages 60 and 62

²⁾ With the thread M20x2 stated by the ISO standard 26613-1, cutting tools with shank diameters up to 18 mm can be inserted deeper in interface C8 as mentioned at dimension E in the chart.

³⁾ Please refer to page 80 onwards regarding the subject of balancing. The max. rpm is depending on the length and the weight of each chuck.


Collet Chucks with Taper Shanks JIS B 6339 – MAS/BT30 (AD)

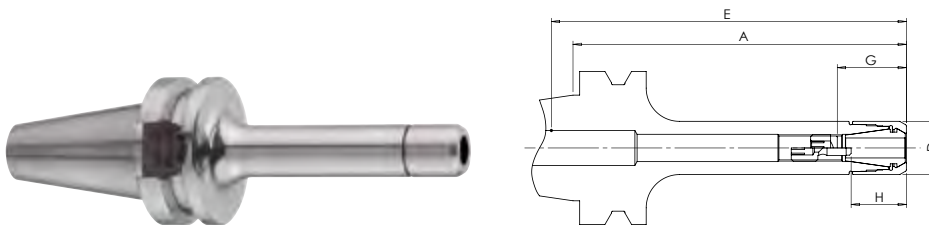

CENTRO|P – Slim Version for HPCM Mini Clamping Nuts

Description	Order-No.	Form	D	A ¹⁾	max. tool insertion depth without stop	Tool insertion depth with stop				Clamping Range / Collets	Clamping Nuts
						Type U		Type W			
					E	G max.	G min.	H max.	H min.		
CP8M-BT30-A=75	43163000750	AD	10	75	75	-	-	-	-	1,0-5,0 GERC8-HP	HPC8M
CP11M-BT30-A=50	43263000500		16	50	68	32	18	22	12	1,0-7,0 GERC11-HP/HPD	HPC11M• HPC11M-DI
CP11M-BT30-A=100	43263001000			100		36		26			

Accessories: Clamping Nuts pages 58, 59, Wrenches pages 63, 64, Mounting Devices page 64, Precision Collets pages 65, 66, Stop Screws page 72, Taper Wipers page 73, Flex-Hone Brushes page 73, Pull Studs pages 76, 77

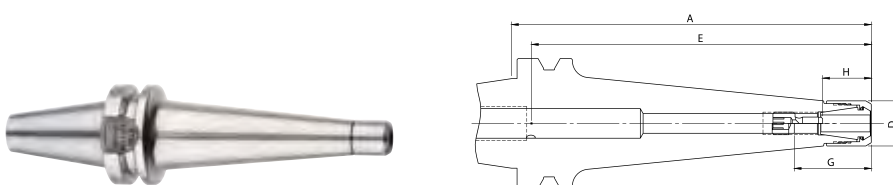


CENTRO|P – Tapered Version for HPCM Mini Clamping Nuts

Description	Order-No.	Form	D	A ¹⁾	max. tool insertion depth without stop	Tool insertion depth with stop				Clamping Range / Collets	Clamping Nuts
					E	Type U		Type W			
						G max.	G min.	H max.	H min.		
CPC11M-BT30-A=130	43263001300	AD	16	130	130	29	19	19	13	1,0–7,0 GERC11-HP/HPD	HPC11M• HPC11M-DI
CPC11M-BT30-A=160	43263001600			160	160						

Accessories: Clamping Nuts pages 58, 59, Wrenches pages 63, 64, Mounting Devices page 64, Precision Collets pages 65, 66, Stop Screws page 72, Taper Wipers page 73, Flex-Hone Brushes page 73, Pull Studs pages 76, 77

¹⁾ Dimension A applies to Clamping Nuts without Sealing Discs. For Clamping Nuts with Sealing Discs see dimension A¹⁾ under Clamping Nuts on page 58
²⁾ Bitte die Hinweise auf Seite 80 ff zum Thema Wuchten beachten. Die max. Drehzahl ist von der Länge and vom Gewicht des Futters abhängig

Collet Chucks with Taper Shanks JIS B 6339 – MAS/BT30 (AD)

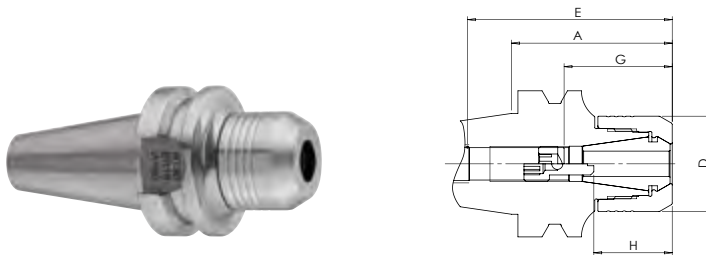


CENTROJP – Version for HPC Clamping Nuts

Description	Order-No.	Form	D	A ¹⁾	max. tool in- sertion depth without stop	Tool insertion depth with stop				Clamping Range / Collets	Clamping Nuts	
						Type U		Type W				
					E	G max.	G min.	H max.	H min.			
CP16-BT30-A=50	44363000500	AD	30	50	73	44	28	31	16	1,0–10,0 GERC16-HP/HPD/GBD	HPC16• HPC16-DI	
CP16-BT30-A=60	44363000600			60	82	45	28	31	14			
CP16-BT30-A=75	44363000750			75	97							
CP16-BT30-A=90	44363000900			90	112							
CP16-BT30-A=100	44363001000			100	123	44						16
CP16-BT30-A=120	44363001200			120	112	45						14
CP20-BT30-A=75	44463000750		32	75	65	47			31	-	-	1,0–13,0 GERC20-HP/HPD/GBD
CP25-BT30-A=60	44563000600		40	60	77	59	35	42	30	1,0–16,0 GERC25-HP/HPD/GBD	HPC25• HPC25-DI	
CP25-BT30-A=75	44563000750			75	72	56	38	39	23			
CP25-BT30-A=90	44563000900			90	87							
CP25-BT30-A=120	44563001200			120	115							
CP32-BT30-A=60	44663000600		50	60	69	52				42	-	-
CP32-BT30-A=75	44663000750			75	84	62	45	24				
CP32-BT30-A=90	44663000900			90	94							

Accessories: Clamping Nuts pages 60, 62, Wrenches pages 63, 64, Mounting Devices page 64, Precision Collets pages 65 - 67, Tap Collets pages 68, 69, Sealing Discs page 71, Stop Screws page 72, Taper Wipers page 73, Flex-Hone Brushes page 73, Pull Studs pages 76, 77

¹⁾ Dimension A applies to Clamping Nuts without Sealing Discs. For Clamping Nuts with Sealing Discs see dimension A¹⁾ under Clamping Nuts on page 60 and 62
²⁾ Please refer to page 80 onwards regarding the subject of balancing. The max. rpm is depending on the length and the weight of each chuck.


Collet Chucks with Taper Shanks JIS B 6339 – MAS/BT40 (AD|AD/B)



CENTRO|P – Slim Version for HPCM Mini Clamping Nuts

Description	Order-No.	Form	D	A ¹⁾	max. tool in- sertion depth without stop	Tool insertion depth with stop				Clamping Range / Collets	Clamping Nuts
						Type U		Type W			
						E	G max.	G min.	H max.		
CP11M-BTB40-A=75	43264000750	AD/B	16	75	85	30	15	21	8	1,0–7,0 GERC11-HP/HPD	HPC11M• HPC11M-DI
CP11M-BTB40-A=100	43264001000			100	110	36	18	26	12		
CP11M-BTB40-A=120	43264001200			120	130	30	15	21	8		
CP11M-BTB40-A=160	43264001600			160	170	36	18	26	12		
CP16M-BTB40-A=75	43364000750		22	75	100	49	27	32	16	1,0–10,0 GERC16-HP/HPD/GBD	HPC16MS• HPC16MS-DI
CP16M-BTB40-A=90	43364000900			90	115						
CP16M-BTB40-A=120	43364001200			120	145						
CP16M-BTB40-A=150	43364001500			150	175						

Accessories: Clamping Nuts pages 58, 59, Wrenches pages 63, 64, Mounting Devices page 64, Precision Collets pages 65 – 67, Tap Collets pages 68, 69, Sealing Discs page 71, Stop Screws page 72, Taper Wipers page 73, Flex-Hone Brushes page 73, Pull Studs pages 76, 77



CENTRO|P – Tapered Version for HPCC Special Clamping Nuts



Description	Order-No.	Form	D	A ¹⁾	α	max. tool in- sertion depth without stop	Tool insertion depth with stop				Clamping Range / Collets	Clamping Nuts
							Type U		Type W			
						E	G max.	G min.	H max.	H min.		
CPC16-BTB40-A=100	44364401000	AD/B	24	100	4,5	110	48	28	35	20	1,0-10,0 GERC16-HP/ HPD/GBD	HPC16C• HPC16C-DI
CPC16-BTB40-A=160	44364401600			160		170						

Accessories: Clamping Nuts page 59, Wrenches pages 63, 64, Mounting Devices page 64, Precision Collets pages 65 – 67, Tap Collets pages 68, 69, Sealing Discs page 71, Stop Screws page 72, Taper Wipers page 73, Flex-Hone Brushes page 73, Pull Studs pages 76, 77

¹⁾ Dimension A applies to Clamping Nuts without Sealing Discs. For Clamping Nuts with Sealing Discs see dimension A¹⁾ under Clamping Nuts on pages 58 and 59

²⁾ Please refer to page 80 onwards regarding the subject of balancing. The max. rpm is depending on the length and the weight of each chuck.

Collet Chucks with Taper Shanks JIS B 6339 – MAS/BT40 (AD|AD/B)




CENTRO|P – Version for HPC Clamping Nuts

Description	Order-No.	Form	D	A ¹⁾	max. tool in- sertion depth without stop	Tool insertion depth with stop				Clamping Range / Collets	Clamping Nuts
						Type U		Type W			
				E	G max.	G min.	H max.	H min.			
CP16-BT40-A=70	44365000700	AD	30	70	110	45	28	31	16	1,0–10,0 GERC16-HP/HPD/GBD	HPC16• HPC16-DI
CP16-BTB40-A=70	44364000700	AD/B									
CP16-BT40-A=100	44365001000	AD		100	138						
CP16-BTB40-A=100	44364001000	AD/B		120	140						
CP16-BTB40-A=120	44364001200			160	198						
CP16-BTB40-A=160	44364001600			200	238						
CP16-BTB40-A=200	44364002000										
CP20-BTB40-A=75	44464000750	AD/B	32	75	76	57	31	-	-	1,0–13,0 GERC20-HP/HPD/GBD	HPC20• HPC20-DI
CP20-BTB40-A=120	44464001200			120	105						
CP25-BTB40-A=55	44564000550	AD/B	40	55	93	60	44		24	1,0–16,0 GERC25-HP/HPD/GBD	HPC25• HPC25-DI
CP25-BT40-A=70	44565000700	AD		70	110						
CP25-BTB40-A=70	44564000700	AD/B									
CP25-BT40-A=100	44565001000	AD		100	100						
CP25-BTB40-A=100	44564001000	AD/B		120							
CP25-BTB40-A=120	44564001200			160	116						
CP25-BTB40-A=160	44564001600			200	146						
CP25-BTB40-A=200	44564002000										
CP32-BTB40-A=55	44664000550	AD/B	50	55	90	70	52	61	35	2,0–20,0 GERC32-HP/HPD/GBD	HPC32• HPC32-DI
CP32-BT40-A=70	44665000700	AD		70	100						
CP32-BTB40-A=70	44664000700	AD/B									
CP32-BT40-A=100	44665001000	AD		100	113						
CP32-BTB40-A=100	44664001000	AD/B		120	110						
CP32-BTB40-A=120	44664001200			160	129						
CP32-BTB40-A=160	44664001600										
CP40-BT40-A=70	44765000700		AD	63	70	90	58	48	-	-	3,0–26,0 GERC40-HP/HPD/GBD
CP40-BT40-A=100	44765001000	100			120	65					

Accessories: Clamping Nuts pages 60, 62, Wrenches pages 63, 64, Mounting Devices page 64, Precision Collets pages 65 – 67, Tap Collets pages 68, 69, Sealing Discs page 71, Stop Screws page 72, Taper Wipers page 73, Flex-Hone Brushes page 73, Pull Studs pages 76, 77

¹⁾ Dimension A applies to Clamping Nuts without Sealing Discs. For Clamping Nuts with Sealing Discs see dimension A¹⁾ under Clamping Nuts on pages 60 and 62
²⁾ Please refer to page 80 onwards regarding the subject of balancing. The max. rpm is depending on the length and the weight of each chuck.



Collet Chucks with Taper Shanks JIS B 6339 – MAS/BT40 (AD/B)



CENTRO|P – Version for HPC Clamping Nuts

Description	Order-No.	Form	D	A ¹⁾	max. tool insertion depth without stop		Tool insertion depth with stop				Clamping Range / Collets	Clamping Nuts
					E ²⁾	F ²⁾	G max.	G min.	H max.	H min.		
CP225DG-BTB40-A=48	48464000480	AD/B	50	48	89	59	62	56	-	-	2,0–25,0 FM25DG-HP	HPC225• HPC225-DIG

Accessories: Clamping Nuts page 61, Wrenches pages 63, 64, Mounting Devices page 64, Precision Collets page 70, Sealing Discs page 71, Stop Screws page 72, Taper Wipers page 73, Flex-Hone Brushes page 73, Pull Studs pages 76, 77

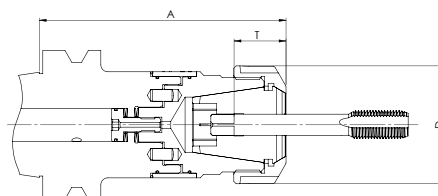


SYNCHRO|T

Description	Order-No.	Form	D	A	Tap insertion depth T				Cutting range	Collets
					Shank-ø 2,8-7,1	Shank-ø 8-9	Shank-ø 10-16	Shank-ø 18-25		
ST16-GB-BTB40-A=84	52364000840	AD/B	30	84	18	22	25	-	M3–M12	GERC16-GBD
ST20-GB-BTB40-A=85	52464000850		32	85				-	M3–M16	GERC20-GBD
ST25-GB-BTB40-A=89	52564000890		40	89				30	M3–M20	GERC25-GBD
ST32-GB-BTB40-A=110	52664001100		50	110				33	M4–M27	GERC32-GBD
ST40-GB-BTB40-A=115	52764001150		63	115				33	M4–M33	GERC40-GBD

Accessories: Wrenches pages 63, 64, Mounting Devices page 64, Tap Collets pages 68, 69, Taper Wipers page 73, Flex-Hone Brushes page 73, Pull Studs pages 76, 77

¹⁾ Dimension A applies to Clamping Nuts without Sealing Discs. For Clamping Nuts with Sealing Discs see dimension A¹⁾ under Clamping Nuts on page 61
²⁾ Dimension E is for tool shanks ≤ 20 mm and dimension F is for tool shanks > 20 mm
³⁾ Please refer to page 80 onwards regarding the subject of balancing. The max. rpm is depending on the length and the weight of each chuck.


Collet Chucks with Taper Shanks JIS B 6339 – MAS/BT50 (AD|AD/B)



CENTRO|P – Version for HPC Clamping Nuts

Description	Order-No.	Form	D	A ¹⁾	max. tool in- sertion depth without stop	Tool insertion depth with stop				Clamping Range / Collets	Clamping Nuts
						Type U		Type W			
				E	G max.	G min.	H max.	H min.			
CP16-BT50-A=105	44367001050	AD	30	105	105	43	29	-	-	1,0–10,0 GERC16-HP/HPD/GBD	HPC16• HPC16-DI
CP16-BT50-A=135	44367001350			135	135						
CP25-BT50-A=105	44567001050		40	105	105	64	38	46	36	1,0–16,0 GERC25-HP/HPD/GBD	HPC25• HPC25-DI
CP25-BT50-A=135	44567001350			135	135						
CP25-BT50-A=165	44567001650			165	165						
CP32-BT50-A=70	44667000700	AD/B	50	70	90	75	45	55	30	2,0–20,0 GERC32-HP/HPD/GBD	HPC32• HPC32-DI
CP32-BTB50-A=100	44666001000	AD		100	150	70	53	63	35		
CP32-BT50-A=135	44667001350	AD/B		135	135	70	45	52	42		
CP32-BTB50-A=160	44666001600	AD	63	70	120	48	55	-	-	3,0–26,0 GERC40-HP/HPD/GBD	HPC40• HPC40-DI
CP40-BT50-A=70	44767000700	AD		100	150		70				
CP40-BT50-A=100	44767001000										

Accessories: Clamping Nuts pages 60, 62, Wrenches pages 63, 64, Mounting Devices page 64, Precision Collets pages 65 - 67, Tap Collets pages 68, 69, Sealing Discs page 71, Stop Screws page 72, Taper Wipers page 73, Flex-Hone Brushes page 73, Pull Studs pages 76, 77

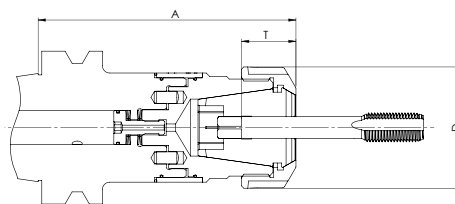


SYNCHRO|T

Description	Order-No.	Form	D	A	Tap insertion depth T				Cutting range	Collets
					Shank-ø 2,8–7,1	Shank-ø 8–9	Shank-ø 10–16	Shank-ø 18–25		
ST16-GB-BTB50-A=99	52366000990	AD/B	30	99	18	22	-	-	M3–M12	GERC16-GBD
ST20-GB-BTB50-A=100	52466001000		32	100					M3–M16	GERC20-GBD
ST25-GB-BTB50-A=104	52566001040		40	104			25	30	M3–M20	GERC25-GBD
ST32-GB-BTB50-A=120	52666001200		50	120					M4–M27	GERC32-GBD
ST40-GB-BTB50-A=120	52766001200		63	120					M4–M33	GERC40-GBD

Accessories: Wrenches pages 63, 64, Mounting Devices page 64, Tap Collets pages 68, 69, Taper Wipers page 73, Flex-Hone Brushes page 73, Pull Studs pages 76, 77

¹⁾ Dimension A applies to Clamping Nuts without Sealing Discs. For Clamping Nuts with Sealing Discs see dimension A¹⁾ under Clamping Nuts on pages 60 and 62
²⁾ Please refer to page 80 onwards regarding the subject of balancing. The max. rpm is depending on the length and the weight of each chuck.

Collet Chucks with Taper Shanks ANSI B.50 – CAT40 (AD/B)



GER


MINI

 G 2,5
 25.000rpm
 or US 1gmm³⁾

CENTROJP – Slim Version for HPCM Mini Clamping Nuts

Description	Order-No.	Form	D	D1	A ¹⁾	max. tool insertion depth without stop	Tool insertion depth with stop				Clamping Range / Collets	Clamping Nuts
							Type U	Type W				
						E	G max.	G min.	H max.	H min.		
CP11M-CAT40-A=4" ²⁾	43275001016	AD/B	16	44,45	4"	130	43	19	32	10	1,0–7,0 GERC11-HP/ HPD	HPC11M• HPC11M-DI
CP11M-CAT40-A=5" ²⁾	43275001270				5"	150						

Accessories: Clamping Nuts pages 58, 59, Wrenches pages 63, 64, Mounting Devices page 64, Precision Collets pages 65, 66, Stop Screws page 72, Taper Wipers page 73, Flex-Hone Brushes page 73



GER

TAPERED

 G 2,5
 25.000rpm
 or US 1gmm³⁾

CENTROJP – Tapered Version for HPCC Special Clamping Nuts

Description	Order-No.	Form	D	D1	A ¹⁾	α	max. tool insertion depth without stop	Tool insertion depth with stop				Clamping Range / Collets	Clamping Nuts
								Type U	Type W				
							E	G max.	G min.	H max.	H min.		
CPC16-CAT40-A=4" ²⁾	44375401016	AD/B	24	44,45	4"	4,5	125	56	29	42	18	1,0–10,0 GERC16-HP/ HPD/GBD	HPC16C• HPC16C-DI
CPC16-CAT40-A=6" ²⁾	44375401524				6"	2,5	175	66		47			



Accessories: Clamping Nuts page 59, Wrenches pages 63, 64, Mounting Devices page 64, Precision Collets pages 65 - 67, Tap Collets pages 68, 69, Sealing Discs page 71, Stop Screws page 72, Taper Wipers page 73, Flex-Hone Brushes page 73

¹⁾ Dimension A applies to Clamping Nuts without Sealing Discs. For Clamping Nuts with Sealing Discs see dimension A¹⁾ under Clamping Nuts on pages 58 and 59

²⁾ CAT40 is supplied with thread 5/8"-11 UNC complying with ANSI B5.50

³⁾ Please refer to page 80 onwards regarding the subject of balancing. The max. rpm is depending on the length and the weight of each chuck.

Collet Chucks with Taper Shanks ANSI B.50 – CAT40 (AD/B)



CENTROIP – Version for HPC Clamping Nuts

Description	Order-No.	Form	D	D1	A ¹⁾	max. tool insertion depth without stop	Tool insertion depth with stop				Clamping Range / Collets	Clamping Nuts	
							Type U		Type W				
						E	G max.	G min.	H max.	H min.			
CP16-CAT40-A=2,5 ^{"2)}	44375000635	AD/B	30	44,45	2,5"	75	45	28	32	16	1,0–10,0 GERC16-HP/ HPD/GBD	HPC16• HPC16-DI	
CP16-CAT40-A=4 ^{"2)}	44375001016				4"	125							
CP16-CAT40-A=5 ^{"2)}	44375001270				5"	150							
CP20-CAT40-A=3 ^{"2)}	44475000762		32		3"	63	45	33	-	-	1,0–13,0 GERC20-HP/ HPD/GBD	HPC20• HPC20DI	
CP20-CAT40-A=4 ^{"2)}	44475001016				4"								
CP25-CAT40-A=3 ^{"2)}	4457500762		40		3"	80	58	35	45	35	1,0–16,0 GERC25-HP/ HPD/GBD	HPC25• HPC25-DI	
CP25-CAT40-A=4 ^{"2)}	44575001016				4"	85	65						26
CP32-CAT40-A=3 ^{"2)}	44675000762		50		50	3"	94	62	75	58	44	2,0–20,0 GERC32-HP/ HPD/GBD	HPC32• HPC32-DI
CP32-CAT40-A=4 ^{"2)}	44675001016					4"		65	41	48	27		
CP32-CAT40-A=5 ^{"2)}	44675001270					5"		51	75	58	26		
CP32-CAT40-A=6 ^{"2)}	44675001524					6"	134	65	41	48	27		
CP40-CAT40-A=4 ^{"2)}	44775001016				63		4"	74	-	-	-	-	3,0–26,0 GERC40-HP/ HPD/GBD



Accessories: Clamping Nuts pages 60, 62, Wrenches pages 63, 64, Mounting Devices page 64, Precision Collets pages 65 – 67, Tap Collets pages 68, 69, Sealing Discs page 71, Stop Screws page 72, Taper Wipers page 73, Flex-Hone Brushes page 73

¹⁾ Dimension A applies to Clamping Nuts without Sealing Discs. For Clamping Nuts with Sealing Discs see dimension A¹⁾ under Clamping Nuts on pages 60 and 62

²⁾ CAT40 is supplied with thread 5/8"-11 UNC complying with ANSI B5.50

³⁾ Please refer to page 80 onwards regarding the subject of balancing. The max. rpm is depending on the length and the weight of each chuck.

Collet Chucks with Taper Shanks ANSI B.50 – CAT50 (AD/B)



CENTROJP – Version for HPC Clamping Nuts

Description	Order-No.	Form	D	D1	A ¹⁾	max. tool in- sertion depth without stop	Tool insertion depth with stop				Clamping Range / Collets	Clamping Nuts		
							Type U		Type W					
						E	G max.	G min.	H max.	H min.				
CP16-CAT50-A=4 ⁽⁺²⁾	44377001016	AD/B	30	69,85	4"	125	57	30	43	19	1,0–10,0 GERC16-HP/ HPD/GBD	HPC16• HPC16-DI		
CP16-CAT50-A=6 ⁽⁺²⁾	44377001524				6"	175								
CP20-CAT50-A=4 ⁽⁺²⁾	44477001016		32		4"	87		32	-	-			1,0–13,0 GERC20-HP/ HPD/GBD	HPC20• HPC20-DI
CP20-CAT50-A=6 ⁽⁺²⁾	44477001524				6"	115								
CP25-CAT50-A=4 ⁽⁺²⁾	44577001016		40		4"	85	65	36	46	25	1,0–16,0 GERC25-HP/ HPD/GBD	HPC25• HPC25-DI		
CP25-CAT50-A=6 ⁽⁺²⁾	44577001524				6"	115								
CP32-CAT50-A=4 ⁽⁺²⁾	44677001016		50		4"	95		41	27	2,0–20,0 GERC32-HP/ HPD/GBD			HPC32• HPC32-DI	
CP32-CAT50-A=6 ⁽⁺²⁾	44677001524				6"	120								
CP40-CAT50-A=4 ⁽⁺²⁾	44777001016		63		4"	95	57	47	-		-	3,0–26,0 GERC40-HP/ HPD/GBD		HPC40• HPC40-DI
CP40-CAT50-A=6 ⁽⁺²⁾	44777001524				6"	120	67							


Accessories: Clamping Nuts pages 60, 62, Wrenches pages 63, 64, Mounting Devices page 64, Precision Collets pages 65 - 67, Tap Collets pages 68, 69, Sealing Discs page 71, Stop Screws page 72, Taper Wipers page 73, Flex-Hone Brushes page 73

¹⁾ Dimension A applies to Clamping Nuts without Sealing Discs. For Clamping Nuts with Sealing Discs see dimension A¹⁾ under Clamping Nuts on pages 60 and 62

²⁾ CAT50 is supplied with thread 1"-8 UNC complying with ANSI B5.50

³⁾ Please refer to page 80 onwards regarding the subject of balancing. The max. rpm is depending on the length and the weight of each chuck.


Collet Chucks with Cylindrical Shank (AD)

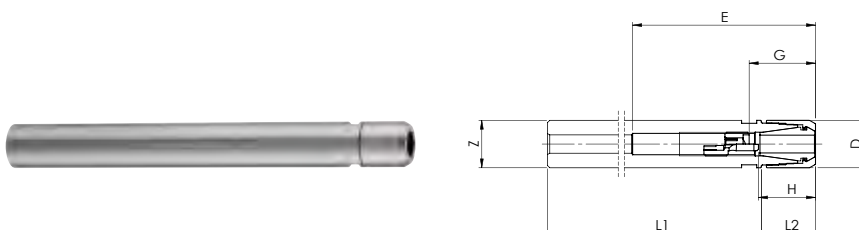

CENTROJP – Tool Extension for HPCM Mini Clamping Nuts

Description	Order-No.	Z	D	L1	L2 ¹⁾	max. tool insertion depth without stop E	Tool insertion depth with stop				Clamping Range / Collets	Clamping Nuts
							Type U	Type W				
							G max.	G min.	H max.	H min.		
CP8M-Z10-L=150	42110001500	10	10	138	12	16	-	-	-	-	1,0-5,0 GERC8-HP	HPC8M
CP8M-Z10-L=200	42110002000			188								
CP11M-Z16-L=150	42216001500	16	16	133	17	68	36	18	26	12	1,0-7,0 GERC11-HP/ HPD	HPC11M• HPC11M-DI
CP11M-Z16-L=200	42216002000			183								
CP16M-Z16-L=150	42316001500	20	22	117	33	68	48	28	35	16	1,0-10,0 GERC16-HP/ HPD/GBD	HPC16MS• HPC16MS-DI
CP16M-Z20-L=150	42320001500			117								
CP16M-Z20-L=200	42320002000			167								

Accessories: Clamping Nuts pages 58, 59, Wrenches pages 63, 64, Precision Collets pages 65 - 67, Tap Collets pages 68, 69, Sealing Discs page 71, Stop Screws page 72, Taper Wipers page 73, Flex-Hone Brushes page 73

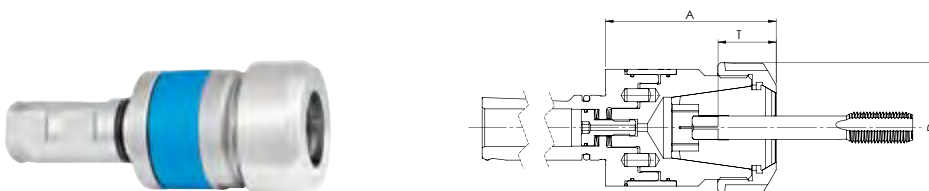


SYNCHROJT – with Shank DIN 1835 B+E

Description	Order-No.	Z	D	A	Tap insertion depth T				Cutting range	Collets
					Shank-ø 2,8 - 7,1	Shank-ø 8 - 9	Shank-ø 10 - 16	Shank-ø 18 - 25		
ST16-GB-Z20-A=58	52304000580	20	30	58	18	22	-	-	M3-M12	GERC16-GBD
ST16-GB-Z25-A=58	52305000580	25		58						
ST20-GB-Z20-A=59	52404000590	20	32	59			25	-	M3-M16	GERC20-GBD
ST20-GB-Z25-A=61	52405000610	25		61						
ST25-GB-Z20-A=63	52504000630	20	40	63					M3-M20	GERC25-GBD
ST25-GB-Z25-A=65	52505000650	25		65						
ST32-GB-Z25-A=69	52605000690	25	50	69			30	-	M4-M27	GERC32-GBD
ST32-GB-Z25-A=87	52605000870	25		87						
ST32-GB-Z32-A=69	52606000690	32	63	69			33	-	M4-M33	GERC40-GBD
ST40-GB-Z25-A=109	52705001090	25		109						
ST40-GB-Z32-A=109	52706001090	32	63	109						

Accessories: Wrenches pages 63, 64, Tap Collets pages 68, 69, Taper Wipers page 73, Flex-Hone Brushes page 73

¹⁾ L2 applies to Clamping Nuts without Sealing Discs, for Clamping Nuts with Sealing Discs see dimension A¹⁾ under Clamping Nuts on pages 58 and 59


Collet Chucks with Taper Shanks similar DIN 69871 – A30 (Wood Working)



CENTROJP – Version for HPC Clamping Nuts (without driving and positioning slot)

Description	Order-No.	Form	D	A ¹⁾	max. tool in- sertion depth without stop	Tool insertion depth with stop				Clamping Range / Collets	Clamping Nuts
						Type U		Type W			
					E	G max.	G min.	H max.	H min.		
CP32-A30H-A=50	44613000500	A	50	50	66	52	40	-	-	2,0–20,0 GERC32-HP/HPD/GBD	HPC32• HPC32-DI
CP32-A30H-A=70	44613000701			70	76						

Accessories: Clamping Nuts pages 60, 62, Wrenches pages 63, 64, Mounting Devices page 64, Precision Collets pages 65 – 67, Tap Collets pages 68, 69, Sealing Discs page 71, Stop Screws page 72, Taper Wipers page 73, Flex-Hone Brushes page 73



CENTROJP – Version for HPC Clamping Nuts

Description	Order-No.	Form	D	A ¹⁾	max. tool insertion depth without stop		Tool insertion depth with stop				Clamping Range / Collets	Clamping Nuts
					E ²⁾	F ²⁾	Type U		Type W			
							G max.	G min.	H max.	H min.		
CP225DG-A30-A=70	48413000700	A	50	70	81	57	61	53	-	-	2,0–25,0 FM25DG•HP	HPC225• HPC225-DIG


Accessories: Clamping Nuts page 61, Wrenches pages 63, 64, Mounting Devices page 64, Precision Collets page 70, Sealing Discs page 71, Stop Screws page 72, Taper Wipers page 73, Flex-Hone Brushes page 73

¹⁾ Dimension A applies to Clamping Nuts without Sealing Discs. For Clamping Nuts with Sealing Discs see dimension A¹⁾ under Clamping Nuts on pages 60, 61 and 62

²⁾ Dimension E is for tool shanks ≤ 20 mm and dimension F is for tool shanks > 20 mm

³⁾ Please refer to page 80 onwards regarding the subject of balancing. The max. rpm is depending on the length and the weight of each chuck.

Accessories Clamping Nuts HPC




GER

Mini Clamping Nuts HPCM

Description	Order-No.	Clamping Range	D	L	for Collet Chucks	for Collets
HPC8M	4381000	1,0 – 5,0	10	12	CP8M	GERC8-HP
HPC11M	4381100	1,0 – 7,0	16	16,2	CP11M•CPC11M	GERC11-HP/HPD
HPC16MS	43812000010	1,0 – 10,0	22	20,9	CP16M•CPC16M	GERC16-HP/HPD/GBD
HPC16M	4381200		24			

= with extremely small dimensions and for high speeds

= only the nominal diameter can be clamped



GER

Mini Clamping Nuts HPCM-DI – sealed

Description	Order-No.	Clamping Diameter	D	L	A ¹⁾	for Collet Chucks	for Collets
HPC11M-DI Ø=3,0	43821010300	3,0	16	18,7	+2,5	CP11M•CPC11M	GERC11-HP
HPC11M-DI Ø=4,0	43821010400	4,0					
HPC11M-DI Ø=5,0	43821010500	5,0					
HPC11M-DI Ø=6,0	43821010600	6,0					
HPC11M-DI Ø=7,0	43821010700	7,0					

= with extremely small dimensions and for high speeds

= for direct sealing (for internal coolant supply or for sealing against any ingress of dirt)

= depending on tool shank Ø a Clamping Nut is required

= only the nominal diameter can be clamped

Due to their design DI Clamping Nuts are longer than standard Clamping Nuts (A-dimension see product pages 18 to 57 plus A¹⁾)




GER

Collet Extractor AZ-ER for Mini Clamping Nuts HPCM

Description	Order-No.	for Clamping Nut	for Collets
AZ-ER8	4499000	HPC8M	GERC8-HP
AZ-ER11	4499100	HPC11M•HPC11M-DI	GERC11-HP/HPD

= for extraction of the Collet out of the Clamping Nut

Accessories Clamping Nuts HPC




GER

Mini Clamping Nuts HPCM-DI for Sealing Discs

Description	Order-No.	Clamping Range	D	L	A ¹⁾	for Collet Chucks	for Collets
HPC16MS-DI	43822000010	1,0 – 10,0	22	23,9	+3	CP16M•CPC16M	GERC16-HP/HPD/GBD
HPC16M-DI	4382200		24				

- = with extremely small dimensions and for high speeds
- = for Sealing Discs (for internal coolant supply or for sealing against any ingress of dirt)
- = only the nominal diameter can be clamped

Due to their design DI Clamping Nuts are longer than standard Clamping Nuts (A-dimension see product pages 18 to 57 plus A¹⁾)




GER

Special Clamping Nuts HPCC (tapered)

Description	Order-No.	Clamping Range	D	L	for Collet Chucks	for Collets
HPC16C	4483200	1,0 – 10,0	24	23,2	CPC16	GERC16-HP/HPD/GBD

- = tapered Clamping Nuts for mould-making industry
- = only the nominal diameter can be clamped



GER


Special Clamping Nuts HPCC-DI (tapered) for Sealing Discs

Description	Order-No.	Clamping Range	D	L	A ¹⁾	for Collet Chucks	for Collets
HPC16C-DI	4484200	1,0 – 10,0	24	26,2	+3	CPC16	GERC16-HP/HPD/GBD

- = tapered Clamping Nuts for mould-making industry
- = for Sealing Discs (for internal coolant supply or for sealing against any ingress of dirt)
- = only the nominal diameter can be clamped

Due to their design DI Clamping Nuts are longer than standard Clamping Nuts (A-dimension see product pages 18 to 57 plus A¹⁾)

Accessories Clamping Nuts HPC



GER


Clamping Nuts HPC

Description	Order-No.	Clamping Range	D	L	for Collet Chucks	for Collets
HPC16	4481200	1,0 – 10,0	30	23,4	CP16	GERC16-HP/HPD/GBD
HPC20	4481300	1,0 – 13,0	32	24,6	CP20	GERC20-HP/HPD/GBD
HPC25	4481400	1,0 – 16,0	40	25,6	CP25	GERC25-HP/HPD/GBD
HPC32	4481500	2,0 – 20,0	50	26,9	CP32	GERC32-HP/HPD/GBD
HPC40	4481600	3,0 – 26,0	63	31,5	CP40	GERC40-HP/HPD/GBD

= for high speeds

= for very precise clamping of HPC tools

= only the nominal diameter can be clamped



GER

Clamping Nuts HPC-DI for Sealing Discs

Description	Order-No.	Clamping Range	D	L	A ¹⁾	for Collet Chucks	for Collets
HPC16-DI	4482200	1,0 – 10,0	30	26,4	+3	CP16	GERC16-HP/HPD/GBD
HPC20-DI	4482300	1,0 – 13,0	32	27,6	+3	CP20	GERC20-HP/HPD/GBD
HPC25-DI	4482400	1,0 – 16,0	40	28,9	+3,3	CP25	GERC25-HP/HPD/GBD
HPC32-DI	4482500	2,0 – 20,0	50	30,1	+3,2	CP32	GERC32-HP/HPD/GBD
HPC40-DI	4482600	3,0 – 26,0	63	34,8	+3,3	CP40	GERC40-HP/HPD/GBD

= for high speeds


= for very precise clamping of HPC tools

= for Sealing Discs (for internal coolant supply or for sealing against any ingress of dirt)

= only the nominal diameter can be clamped

Due to their design DI Clamping Nuts are longer than standard Clamping Nuts (A-dimension see product pages 18 to 57 plus A¹⁾)


Accessories Clamping Nuts HPC



Clamping Nuts HPC

Description	Order-No.	Clamping Range	D	L	for Collet Chucks	for Collets
HPC225	4881500	2,0 – 25,0	50	21,2	CP225DG	FM25DG•HP
HPC432	4881700	4,0 – 32,0	63	28	CP432DG	FM32DG

- = for high speeds
- = for very precise clamping of HPC tools
- = only the nominal diameter can be clamped




Clamping Nuts HPC-DIG for Sealing Discs

Description	Order-No.	Clamping Range	D	L	A¹¹	for Collet Chucks	for Collets
HPC225-DIG	4882400	2,0 – 25,0	50	25,2	+4	CP225DG	FM25DG•HP
HPC432-DIG	4882700	4,0 – 32,0	63	32	+4	CP432DG	FM32DG

- = for high speeds
- = for very precise clamping of HPC tools
- = for Sealing Discs (for internal coolant supply or for sealing against any ingress of dirt)
- = only the nominal diameter can be clamped

Due to their design DI Clamping Nuts are longer than standard Clamping Nuts (A-dimension see product pages 18 to 57 plus A¹¹)

Accessories Clamping Nuts HSS



GER


Clamping Nuts HSS

Description	Order-No.	Clamping Range	D	L	for Collet Chucks	for Collets
CP16-HSS-Ø-0,4	4185200	1,0 – 10,0	30	21,3	CP16	GERC16-HP
CP20-HSS-Ø-0,4	4185300	1,0 – 13,0	32	22,8	CP20	GERC20-HP
CP25-HSS-Ø-0,4	4185400	1,0 – 16,0	40	23,8	CP25	GERC25-HP
CP32-HSS-Ø-0,4	4185500	2,0 – 20,0	50	24,9	CP32	GERC32-HP
CP40-HSS-Ø-0,4	4185600	3,0 – 26,0	63	31,6	CP40	GERC40-HP

= for clamping HSS tools

= limited speed (pre-balanced)

= with collapse (minus 0,4 mm)



GER

Clamping Nuts HSS-DI for Sealing Discs

Description	Order-No.	Clamping Range	D	L	A ¹⁾	for Collet Chucks	for Collets
CP16-HSS-DI-Ø-0,4	4186200	1,0 – 10,0	30	24,8	+2,5	CP16	GERC16-HP
CP20-HSS-DI-Ø-0,4	4186300	1,0 – 13,0	32	25,9	+3,1	CP20	GERC20-HP
CP25-HSS-DI-Ø-0,4	4186400	1,0 – 16,0	40	26,8	+3	CP25	GERC25-HP
CP32-HSS-DI-Ø-0,4	4186500	2,0 – 20,0	50	28,2	+3,3	CP32	GERC32-HP
CP40-HSS-DI-Ø-0,4	4186600	3,0 – 26,0	63	34,6	+3	CP40	GERC40-HP

= for clamping HSS tools

= limited speed (pre-balanced)

= for Sealing Discs (for internal coolant supply or for sealing against any ingress of dirt)

= with collapse (minus 0,4 mm)

Due to their design DI Clamping Nuts are longer than standard Clamping Nuts (A-dimension see product pages 18 to 57 plus A¹⁾)

Accessories Wrenches RO|DRO



Ingeniously simple, simply ingenious!

Our Roller Bearing Wrenches are designed for safe, quick and simple clamping of tools without any risk of injury to the user, because they cannot slip off the clamping nuts. They are available in two versions:

with standard handle or with square drive adapter for defined clamping of tools using a torque wrench.

Our Roller Bearing Wrenches are suitable for:

- = all CENTRO|P Clamping Nuts and all Clamping Nuts complying with DIN ISO15488 (ER/ESX) with external diameters 10/16/22/24/30/32/35/40/42/50 and 63 mm
- = all Clamping Nuts without grooves and drilling, which is more positive at high speeds because of improved weight properties and quiet running.

Roller Bearing Wrenches RO with Handle

Description	Order-No.	for Clamping Nutn
ROD10	4996200	HPC8M
RO16	4990400	HPC11M•HPC11M-DI
RO22	4990500	HPC16MS•HPC16MS-DI
RO24	4990600	HPC16M•HPC16M-DI•HPC16C•HPC16C-DI
RO30	4990800	HPC16•HPC16-DI•CP16-HSS-Ø-0,4•CP16-HSS-DI-Ø-0,4•ST16-GB
RO32	4991000	HPC20•HPC20-DI•CP20-HSS-Ø-0,4•CP20-HSS-DI-Ø-0,4•ST20-GB
RO40	4991400	HPC25•HPC25-DI•CP25-HSS-Ø-0,4•CP25-HSS-DI-Ø-0,4•ST25-GB
RO50	4991800	HPC32•HPC32-DI•CP32-HSS-Ø-0,4•CP32-HSS-DI-Ø-0,4•ST32-GB•HPC225•HPC225-DIG
RO63	4992000	HPC40•HPC40-DI•CP40-HSS-Ø-0,4•CP40-HSS-DI-Ø-0,4•ST40-GB•HPC432•HPC432-DIG



Roller Bearing Heads DRO

Description	Order-No.	VKT	for Clamping Nutn
DRO16	4993400	9x12	HPC11M•HPC11M-DI
DRO22	4993500		HPC16MS•HPC16MS-DI
DRO24	4993600		HPC16M•HPC16M-DI•HPC16C•HPC16C-DI
DRO30	4993800		HPC16•HPC16-DI•CP16-HSS-Ø-0,4•CP16-HSS-DI-Ø-0,4•ST16-GB
DRO32	4994000		HPC20•HPC20-DI•CP20-HSS-Ø-0,4•CP20-HSS-DI-Ø-0,4•ST20-GB
DRO40	4994400	14x18	HPC25•HPC25-DI•CP25-HSS-Ø-0,4•CP25-HSS-DI-Ø-0,4•ST25-GB
DRO50	4994800		HPC32•HPC32-DI•CP32-HSS-Ø-0,4•CP32-HSS-DI-Ø-0,4•ST32-GB•HPC225•HPC225-DIG
DRO63	4995000		HPC40•HPC40-DI•CP40-HSS-Ø-0,4•CP40-HSS-DI-Ø-0,4•ST40-GB•HPC432•HPC432-DIG



Accessories Wrenches DRMO



Torque Setting Wrenches DRMO

Description	Order-No.	VKT	Torque range	for Roller Bearing Head
DRMO-10-100	4490400	9x12	10 – 100 Nm	DRO16•DRO22•DRO24•DRO30•DRO32
DRMO-20-200	4490600	14x18	20 – 200 Nm	DRO40•DRO50•DRO63
DRMO-60-300	4490800		60 – 300 Nm	DRO63 (for CP432DG)

Accessories Mounting Devices TBRS




Mounting Devices TBRS with Roller Bearing

Description	Order-No.	D	for holder shanks
TBRS25	4980200	25	HSK25
TBRS32	4980400	32	HSK32•C3
TBRS40	4980600	40	HSK40•C4
TBRS46	4980800	46	MAS/BT30
TBRS50	4981000	50	SK30•HSK50•C5
TBRS63	4981200	63	SK40•HSK63•C6•MAS/BT40•CAT40
TBRS80	4981600	80	HSK80•C8
TBRS97	4981800	97,5	SK50
TBRS100	4982000	100	HSK100•MAS/BT50•CAT50



- = for easy and safe clamping of holder shanks at the flange using rollers for mounting and removing cutting tools, therefore self clamping and ideal for HSK forms E and F as well as polygonal shanks
- = for all common holder shanks such as SK (DIN 69871), HSK (DIN 69893 forms A, B, C, D, E, F), polygonal shanks (ISO 26623-1), MAS/BT (JIS B 6339) and CAT (ANSI B5.50)

Accessories Precision Collets GERC-HP DIN ISO15488-B (ER/ESX)


 Available starting
 January 2015!


GER

Precision Collets GERC-HP – 2 µm for GERC11-HP for GERC40-HP

Description	Order-No.	□	D	L	Pro- file	from-to	steps
4004E GERC8-HP	1361001	5 µm	8,5	13,6	●	1,0 – 5,0	0,5
	1361004				●	1/16"•1/8"•3/16"	
4008E GERC11-HP	1361101	2 µm	11,3	18	●	1,0 – 7,0	0,5
	1361104				●	1/16"•3/32"•1/8"•5/32"•3/16"•7/32"•1/4"	
426E GERC16-HP	1361301	2 µm	17	27,5	●	1,0 – 10,0	0,5
					●	1,1 – 1,4+1,6 – 1,9+2,1 – 2,4	0,1
					●	2,6 – 2,9+3,1 – 3,4+3,6 – 3,8	0,1
					●	5,6•6,3•7,1	
428E GERC20-HP	1361401	2 µm	21	31,5	●	1/16"•3/32"•1/8"•5/32"•3/16"•7/32"•1/4"•9/32"•5/16"•11/32"•3/8"	
	1361404				●	1,0 – 13,0	0,5
430E GERC25-HP	1361501	2 µm	26	34	●	1/8"•3/16"•1/4"•5/16"•3/8"•7/16"•1/2"	
	1361504				●	1,0 – 16,0	0,5
470E GERC32-HP	1361601	2 µm	33	40	●	1/8"•3/16"•1/4"•5/16"•3/8"•7/16"•1/2"•9/16"•5/8"	
	1361604				●	2,0 – 20,0	0,5
472E GERC40-HP	1361701	2 µm	41	46	●	1/8"•3/16"•1/4"•5/16"•3/8"•7/16"•1/2"•9/16"•5/8"•11/16"•3/4"	
	1361704				●	3,0 – 26,0	0,5
					●	13/16"•7/8"•1"	

Ordering Example

Complete Order-No. with the diameter,

e.g. GERC32-HP Ø 6 mm = Order-No. 13616010600 und Ø 1/8"

= Order-No. 13616040318


Inch conversion table please see page 79!

Accessories Precision Collets GERC-HPD

Similar DIN ISO 15488-A



Available starting
April 2015!



GER

Precision Collets GERC-HPD with Seals for IC (Inner Coolant Supply) – 2 µm

Description	Order-No.	□	D	L	Pro- file	from-to	steps
4012E GERC11-HPD	1362101	2 µm	11,2	18	●	3,0-6,0	1,0
	1362104				●	1/8"•3/16"•1/4"	
425E GERC16-HPD	1362301	2 µm	16,7	27,5	●	3,0 – 10,0	1,0
	1362304				●	1/8"•3/16"•1/4"•5/16"•3/8"	
427E GERC20-HPD	1362401	2 µm	20,7	31,5	●	3,0 – 13,0	1,0
	1362404				●	1/8"•3/16"•1/4"•5/16"•3/8"•7/16"•1/2"	
429E GERC25-HPD	1362501	2 µm	25,7	34	●	3,0 – 16,0	1,0
	1362504				●	1/8"•3/16"•1/4"•5/16"•3/8"•7/16"•1/2"•9/16"•5/8"	
469E GERC32-HPD	1362601	2 µm	32,7	40	●	3,0 – 20,0	1,0
	1362604				●	1/8"•3/16"•1/4"•5/16"•3/8"•7/16"•1/2"•9/16"•5/8"•11/16"•3/4"	
471E GERC40-HPD	1362701	2 µm	40,7	46	●	6,0•8,0•10,0•12,0•14,0•16,0•18,0•20,0•22,0•25,0	

Ordering Example


Complete Order-No. with the diameter,

e.g. GERC20-HPD Ø 8 mm = Order-No. 13624010800

or Ø 3/16" = Order-No. 13624040476

Inch conversion table please see page 79!

Accessories Precision Collets GERC-HPDD Similar DIN ISO 15488-A


 Available starting
 April 2015!


GER

Precision Collets GERC-HPDD with Seals for IC (Inner Coolant Supply) and Jet Holes – 2 µm


Description	Order-No.	□	D	L	Pro- file	Standard bore
425E GERC16-HPDD	1363301	2 µm	16,7	27,5	●	4,0•6,0•8,0
429E GERC25-HPDD	1363501	2 µm	25,7	34	●	4,0•6,0•8,0•10,0•12,0•14,0
469E GERC32-HPDD	1363601	2 µm	32,7	40	●	4,0•6,0•8,0•10,0•12,0•14,0•16,0•18,0•20,0
471E GERC40-HPDD	1363701	2 µm	40,7	46	●	10,0•12,0•16,0•20,0•25,0

Ordering Example


Complete Order-No. with the diameter,

e.g. GERC25-HPDD Ø 8 mm = Order-No. 13635010800

Use of shanks with lateral flat with GERC-HPD and GERC-HPDD



Incorrect Position!




Correct Position!

Accessories Tap Collets GERC-GBD

Similar DIN ISO15488-A



Available starting
April 2015!



Tap Collets GERC-GBD with Internal Square Drive and Seals for IC (Inner Coolant Supply) – 10µm

Description	Order-No.	□	D	L	L2	Profile	Standard bore (Shank-Ø/Square)
4031E GERC16-GBD	1382301	10µm	16,7	27,5	18	●/■	2,8/2,1
					22	●/■	3,5/2,7•4,0/3,2•4,5/3,55•5,0/4,0•5,5/4,5•6,0/5,0•6,3/5,0•7,0/5,6•7,1/5,6
4276E GERC20-GBD	1382401	10µm	20,7	31,5	18	●/■	3,5/2,7•4,0/3,2•4,5/3,55•5,0/4,0•5,5/4,5•6,0/5,0•6,3/5,0•7,0/5,6•7,1/5,6
					22	●/■	8,0/6,3•9,0/7,1
					25	●/■	10,0/8,0•11,0/9,0•11,2/9,0•12,0/9,0
4282E GERC25-GBD	1382501	10µm	25,7	34	18	●/■	3,5/2,7•4,0/3,2•4,5/3,55•5,0/4,0•5,5/4,5•6,0/5,0•6,3/5,0•7,0/5,6•7,1/5,6
					22	●/■	8,0/6,3•9,0/7,1
					25	●/■	10,0/8,0•11,0/9,0•11,2/9,0•12,0/9,0•12,5/10,0•14,0/11,2•16,0/12,5
4537E GERC32-GBD	1382601	10µm	32,7	40	18	●/■	4,0/3,2•4,5/3,55•5,0/4,0•5,5/4,5•6,0/5,0•6,3/5,0•7,0/5,6•7,1/5,6
					22	●/■	8,0/6,3•9,0/7,1
					25	●/■	10,0/8,0•11,0/9,0•11,2/9,0•12,0/9,0•12,5/10,0•14,0/11,2•16,0/12,5
					30	●/■	18,0/14,5•20,0/16,0
4716E GERC40-GBD	1382701	10µm	40,7	46	18	●/■	6,0/5,0•6,3/5,0•7,0/5,6•7,1/5,6
					22	●/■	8,0/6,3•9,0/7,1
					25	●/■	10,0/8,0•11,0/9,0•11,2/9,0•12,0/9,0•12,5/10,0•14,0/11,2•16,0/12,5
					33	●/■	18,0/14,5•20,0/16,0•22,0/18,0•25,0/20,0



Ordering Example

Complete Order-No. with the diameter,

e.g. GERC40-GBD Ø 8,0/6,3 mm = Order-No. 13827010800

Accessories Tap Collets GERC-GBDD

Similar DIN ISO15488-A


 Available starting
 April 2015!


Tap Collets GERC-GBDD with Internal Square Drive, Seals for IC (Inner Coolant Supply) and Jet Holes – 10 µm

Description	Order-No.	☐	D	L	L2	Profile	Standard bore (Shank-Ø/Square)
4031E GERC16-GBDD	1383301	10µm	16,7	27,5	18	●/■	3,5/2,7•4,5/3,55•6,0/5,0•7,0/5,6
					22		8,0/6,3
4276E GERC20-GBDD	1383401	10µm	20,7	31,5	18	●/■	4,5/3,55•6,0/5,0•7,0/5,6
					22		8,0/6,3•9,0/7,1
					25		10,0/8,0
4282E GERC25-GBDD	1383501	10µm	25,7	34	18	●/■	4,5/3,55•6,0/5,0•7,0/5,6
					22		8,0/6,3•9,0/7,1
					25		10,0/8,0•11,0/9,0•12,0/9,0•14,0/11,2
4537E GERC32-GBDD	1383601	10µm	32,7	40	18	●/■	4,5/3,55•6,0/5,0•7,0/5,6
					22		8,0/6,3•9,0/7,1
					25		10,0/8,0•11,0/9,0•12,0/9,0•14,0/11,2
					30		18,0/14,5•20,0/16,0

Ordering Example

Complete Order-No. with the diameter,

e.g. GERC25-GBDD Ø 10,0/8,0 mm = Order-No. 13835011000

Accessories Precision Collets GOZ-DG-HP DIN ISO10897-B



GOZ

Precision Collets GOZ-DG-HP (double slotted) – 3 µm


Description	Order-No.	□	D	L	Pro- file	Standard bore
462E FM25DG-HP	1224201	3µm	35,05	52	●	3,0•4,0•6,0•8,0•10,0•12,0•14,0•16,0•18,0•20,0•25,0

Ordering Example

Complete Order-No. with the diameter,

e.g. FM25DG-HP Ø 20 mm = Order-No. 12242012000

Accessories Precision Collets GOZ-DG DIN ISO10897-B

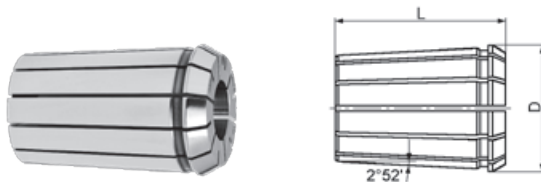

GOZ

Precision Collets GOZ-DG (double slotted) – 6 µm or 10 µm

Description	Order-No.	□	D	L	Pro- file	from-to	steps
462E FM25DG	1220201	6µm	35,05	52	●	2,0 – 25,0	0,5
	1220204				●	1/8"•1/4"•3/8"•1/2"•5/8"•3/4"•1"	
467E FM32DG	1220301	10µm	43,7	60	●	4,0 – 32,0	0,5

Ordering Example

Complete Order-No. with the diameter,

e.g. FM25DG Ø 16 mm = Order-No. 12202011600

or Ø 1/4" = Order-No. 12202040635

Inch conversion table please see page 79!

Accessories Sealing Discs DI|DIG



GER

Sealing Discs DI

Description	Order-No.	D	L	Pro- file	from-to	steps	range	for Clamping Nut	for Collets		
DI16	2430301	12,6	2	●	1,0 – 10,0	0,5	+0,4/-0,1	HPC16MS-DI• HPC16M-DI• HPC16C-DI• HPC16-DI	GERC16-HP		
	2430304			●	1/8"•3/16"•1/4"•5/16"•3/8"						
DI20	2440301	15,8		●	2,0 – 13,0	0,5				HPC20-DI	GERC20-HP
DI25	2450301	20,2		●	2,0 – 16,0					HPC25-DI	GERC25-HP
	2460301			●	2,0 – 20,0						
DI32		26,2		●	1/8"•3/16"•1/4"•5/16"•3/8"• 1/2"•5/8"•3/4"				HPC32-DI	GERC32-HP	
	2460304										
DI40	2470301	34,2		●	3,0 – 26,0	0,5			HPC40-DI	GERC40-HP	
	2470304		●	1/8"•3/16"•1/4"•5/16"•3/8"• 1/2"•5/8"•3/4"•7/8"•1"							

Ordering Example

Complete Order-No. with the diameter,
 e.g. DI32 Ø 16 mm = Order-No. 24603011600 or Ø 1/2"
 = Order-No. 24603041270
 Inch conversion table please see page 79!


GOZ

Sealing Discs DIG

Description	Order-No.	D	L	Pro- file	from-to	steps	range	for Clamping Nut	for Collets
DIG225 (DS50)	2159201	31	4	●	4,0 – 25,0	1,0	-0,5	HPC225-DIG	FM25DG•HP
DIG432 (DS60)	2159301	40		●	4,0 – 32,0			HPC432-DIG	FM32DG


Accessories Data Carrier BIS


GER
GOZ
GB

Data Carrier BIS (BALLUFF)


Description	Order-No.	for Collet Chucks
BIS C-122-04/L	4499900	Alle HSK-A

Accessories Adjustable Stop Screws AS-U|AS-W



Adjustable Stop Screws AS-U

Description	Order-No.	G	SW1	SB	L1	for Collet Chucks
AS-CP11-U	44981000100	M8x1	4	1,6	8	CP11M•CPC11M
AS-CP16-U	44982000100	M11x1	6			CP16M•CPC16M•CP16•CPC16
AS-CP20-U	44983000100	M14x1	5	1,5		CP20
AS-CP25/32/225-U	44984000101	M18x2,5	6	1,6	10	CP25•CP32•CP225DG (for old chuck types)
AS-CP25-U	44984000102	M18x1,5				CP25
AS-CP32/225-U	44984000103	M22x1,5				CP32•CP225DG (for collet chuck series available fall 2011)
AS-CP40-U	44985000100	M28x1,5			25	CP40

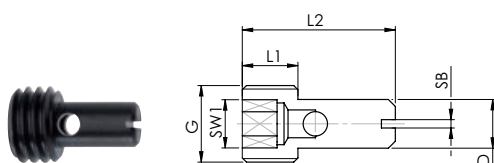

Adjustable Stop Screws AS-W

Description	Order-No.	G	SW1	SB	L1	L2	D	for Collet Chucks
AS-CP11-W	44981000200	M8x1	4	1,2	8	18	4,5	CP11M•CPC11M
AS-CP16-W	44982000200	M11x1				22	7	CP16M•CPC16M•CP16•CPC16
AS-CP25/32/225-W	44984000201	M18x2,5	6	1,6	10	28	10,5	CP25•CP32•CP225DG (for old chuck types)
AS-CP25-W	44984000202	M18x1,5						CP25
AS-CP32/225-W	44984000203	M22x1,5					14	CP32•CP225DG (for collet chuck series available fall 2011)

Accessories Taper Wipers KWK



Taper Wipers KWK-ER

Description	Order-No.	for Chucks and Holders Type
KWK-ER11	2220100	CP11M•CPC11M
KWK-ER16	2220200	CP16•CPC16•CP16M•ST16-GB
KWK-ER20	2220300	CP20•ST20-GB
KWK-ER25	2220400	CP25•ST25-GB
KWK-ER32	2220500	CP32•ST32-GB

Accessories Flex-Hone® Brushes FH

Flex-Hone® Brushes

We recommend the use of Flex-Hone® Brushes for cleaning the bore of the collets. These brushes are flexible and oversized at the beginning, so that they can be used for slightly bigger diameters when new. Afterwards they can also be used for smaller diameters until they need to be replaced.

Instructions for use

Flex-Hone® Brushes should be rotated when inserted into and removed from the collet. Use either a standard commercially available honing oil or drilling emulsion! The speed should be between 60 to 600 r.p.m. depending on the diameter.



Flex-Hone® Brushes FH

Description	Order-No.	Available measurements (please indicate Ø when ordering)
FH-BC 180 SC	2400501	6,4•7•8•9•10•11•12•12,7•14•16•18•20•22,2•25,4

Ordering Example

Complete Order-No. with the diameter,
 e.g. FH-BC 180 SC Ø 12,7 mm = Order-No. 24005011270

Accessories Coolant Supply Tubes and Wrenches IKR|SCHL-IKR



Coolant Supply Tubes IKR


Description	Order-No.	for HSK	Form	G
IKR-HSK32	2490300	32	A und E	M10x1
IKR-HSK40	2490400	40		M12x1
IKR-HSK50	2490500	50		M16x1
IKR-HSK63	2490600	63		M18x1
IKR-HSK80	2490700	80		M20x1,5
IKR-HSK100	2490800	100		M24x1,5



Wrenches SCHL-IKR for Coolant Supply Tubes

Description	Order-No.	for HSK
SCHL-IKR-HSK32	2492300	32
SCHL-IKR-HSK40	2492400	40
SCHL-IKR-HSK50	2492500	50
SCHL-IKR-HSK63	2492600	63
SCHL-IKR-HSK80	2492700	80
SCHL-IKR-HSK100	2492800	100

Accessories Pull Studs AZB




GER

GOZ

GB

Pull Studs AZB DIN 69872-A with bore

Description	Order-No.	L1	L2	D1	D2	D3	G	α	for Taper Shanks
AZB30-DIN-A	2910300	44	24	13	9	13	M12	15°	30
AZB40-DIN-A	2910500	54	26	19	14	17	M16	15°	40
AZB50-DIN-A	2910700	74	34	28	21	25	M24	15°	50




GER

GOZ

GB

Pull Studs AZB DIN 69872-B without bore

Description	Order-No.	L1	L2	D1	D2	D3	G	α	for Taper Shanks
AZB30-DIN-B	2911300	44	24	13	9	13	M12	15°	30
AZB40-DIN-B	2911500	54	26	19	14	17	M16	15°	40
AZB50-DIN-B	2911700	74	34	28	21	25	M24	15°	50




GER

GOZ

GB

Pull Studs AZB ISO 7388/II-B with bore

Description	Order-No.	L1	L2	D1	D2	D3	G	α	for Taper Shanks
AZB40-ISO-A	2920500	44,5	16,4	18,95	12,95	17	M16	45°	40
AZB50-ISO-A	2920700	65	25,5	29	19,6	25	M24	45°	50



GER


GOZ

GB

Pull Studs AZB ISO 7388-B without bore


Description	Order-No.	L1	L2	D1	D2	D3	G	α	for Taper Shanks
AZB40-ISO-B	2921500	44,5	16,4	18,95	12,95	17	M16	45°	40
AZB50-ISO-B	2921700	65	25,5	29	19,6	25	M24	45°	50

Accessories Pull Studs AZB

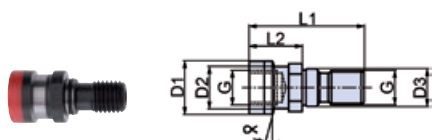


Pull Studs AZB DIN 2080 with inner thread

Description	Order-No.	L1	L2	D1	D2	D3	G	α	for Taper Shanks
AZB40-DIN 2080-G	2943500	53	25	25	21,6	17	M16	15°	40
AZB50-DIN 2080-G	2943700	65	25,1	39,3	32	25	M24	15°	50




Pull Studs AZB MAS/BT 45° (JIS B 6339) with bore

Description	Order-No.	L1	L2	D1	D2	D3	G	α	for Taper Shanks
AZB30-BT-45°-A	2930300	43	23	11	7	12,5	M12	45°	30
AZB40-BT-45°-A	2930500	60	35	15	10	17	M16	45°	40
AZB50-BT-45°-A	2930700	85	45	23	17	25	M24	45°	50



Pull Studs AZB MAS/BT 30° (JIS B 6339) with bore


Description	Order-No.	L1	L2	D1	D2	D3	G	α	for Taper Shanks
AZB30-BT-30°-A	2931300	43	23	11	7	12,5	M12	30°	30
AZB40-BT-30°-A	2931500	60	35	15	10	17	M16	30°	40
AZB50-BT-30°-A	2931700	85	45	23	17	25	M24	30°	50



Pull Studs AZB MAS/BT 90° (JIS B 6339) with bore

Description	Order-No.	L1	L2	D1	D2	D3	G	α	for Taper Shanks
AZB30-BT-90°-A	2932300	43	23	11	7	12,5	M12	90°	30
AZB40-BT-90°-A	2932500	60	35	15	10	17	M16	90°	40
AZB50-BT-90°-A	2932700	85	45	23	17	25	M24	90°	50

Accessories Pull Studs AZB




GER

GOZ

GB

Pull Studs AZB MAS/BT 45° (JIS B 6339) without bore

Description	Order-No.	L1	L2	D1	D2	D3	G	α	for Taper Shanks
AZB30-BT-45°-B	2933300	43	23	11	7	12,5	M12	45°	30
AZB40-BT-45°-B	2933500	60	35	15	10	17	M16	45°	40
AZB50-BT-45°-B	2933700	85	45	23	17	25	M24	45°	50




GER

GOZ

GB

Pull Studs AZB MAS/BT 30° (JIS B 6339) without bore

Description	Order-No.	L1	L2	D1	D2	D3	G	α	for Taper Shanks
AZB30-BT-30°-B	2934300	43	23	11	7	12,5	M12	30°	30
AZB40-BT-30°-B	2934500	60	35	15	10	17	M16	30°	40
AZB50-BT-30°-B	2934700	85	45	23	17	25	M24	30°	50



GER

GOZ

GB

Pull Studs AZB MAS/BT 90° (JIS B 6339) without bore

Description	Order-No.	L1	L2	D1	D2	D3	G	α	for Taper Shanks
AZB30-BT-90°-B	2935300	43	23	11	7	12,5	M12	90°	30
AZB40-BT-90°-B	2935500	60	35	15	10	17	M16	90°	40
AZB50-BT-90°-B	2935700	85	45	23	17	25	M24	90°	50

High Performance Power Clamping System Maxi|GRIP



Basic device MG with Hand Inductor ø 63 mm and Reduction to ø 50mm

Description	Order-No.	ø	for Collet Chucks
MG1 Eco (380 V)	4970200	50 und 63 mm	CP32•CP225DG• CP40•CP432DG



Coolant Bath KW

Description	Order-No.	for holder shanks
KW1	4978500	SK40•HSK63•C6•MAS/BT40•CAT40



Mounting Devices TBRS-KW with Roller Bearing incl. installation parts for fixing on a work bench

Description	Order-No.	D	for holder shanks
TBRS63-KW	49812000010	63	SK40•HSK63•C6• MAS/BT40•CAT40

Information

Conversion Table

Conversion of inch to metric, which is in accordance with the last 4 digits of the order number:							
1/16" = 0159	3/32" = 0238	1/8" = 0318	5/32" = 0397	3/16" = 0476	7/32" = 0556	1/4" = 0635	9/32" = 0714
5/16" = 0794	11/32" = 0873	3/8" = 0953	13/32" = 1032	7/16" = 1111	1/2" = 1270	9/16" = 1429	5/8" = 1588
11/16" = 1746	3/4" = 1905	13/16" = 2064	7/8" = 2223	1" = 2540			

Ordering Example

Collet Chuck

e.g. CP32-AD40-A=100

e.g. CP32-B40-A=100

+Clamping Nut

e.g. HPC32

e.g. HPC32-DI

+Sealing Disc

none

e.g. DI32

+Collet

e.g. GERC32-HP
 e.g. GERC32-HPD
 e.g. GERC32-HPDD
 e.g. GERC32-GBD
 e.g. GERC32-GBDD

e.g. GERC32-HP

+Accessories

Wrenches, Adjustable Stop Screws, Taper Wipers,
 Flex-Hone Brushes, Coolant Supply Tubes, Pull Studs,
 Mounting Devices


In order to guarantee the highest possible flexibility of the Precision Collet Chuck CENTROIP, the Collet Chucks, Clamping Nuts, Collets and the accessories **MUST** be ordered separately.

Please do not hesitate to contact us if you require a version that is not included in this catalogue.

Technical Information | Balancing

Imbalance

- = Rotor centre of gravity **2** is outside its rotational axis **1** (=offset e **3**)

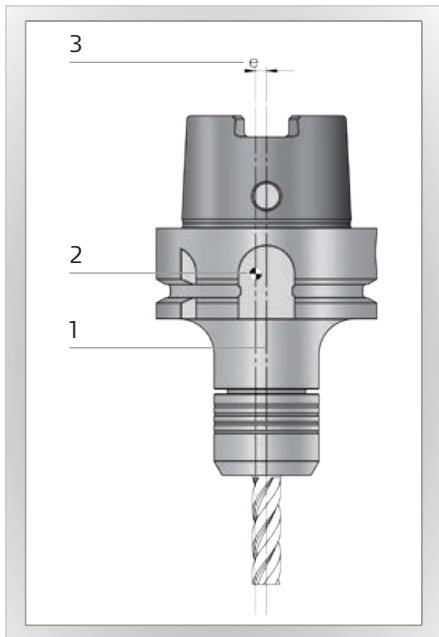

Causes

- = Unsymmetrical bores and milling at the tool holder (e.g. taper shanks DIN 69871 and DIN 69893 HSK form A and B)
- = Unsymmetrical shape of the tool (e.g. clamping surface at the milling cutter)
- = Production tolerances (runout)
- = Spindle runout

Consequences

Centrifugal forces cause vibrations. These cause:

- = Damage to the spindle bearings
- = Mediocre surface quality
- = Insufficient repeatability of accuracy
- = Reduction in tool life
- = Noise

Requirements

Balancing is necessary whenever optimum working conditions have to be achieved e.g.

- = Surface quality
- = Production accuracies

- = Tool operational life
- = or if prescribed by the machine tool manufacturer (warranty claims!)

However, it is only economically sensible to balance at speeds of 8,000 r.p.m. or higher. At speeds lower than this the cutting forces are as a rule greater than the imbalance forces.

Balancing means – determining the centre of gravity axis and moving it back to the axis of rotation.

What Balance Grade

Our CENTRO|P precision collet chucks are fine balanced as standard. Information regarding the balance quality (in relation to the rpm or the minimum residual imbalance) you can find on the respective product page.

r.p.m. limits – Fine balancing in special execution is possible

Adaptation	Speed (up to / r.p.m.)	U	Information
HSK-25*	to 80.000 r.p.m.	≤ 1gmm	The max. speeds (additional fine balancing necessary) were recommended as guideline values as limit speeds for the HSK interfaces within the framework of HSK standardisation, as the speed has the greatest influence and is also the limit for spindle and spindle bearings. The max. rpm, however, should be adapted to the specific cutting process.
HSK-32*	to 50.000 r.p.m.	≤ 1gmm	
HSK-40*	to 42.000 r.p.m.	≤ 1gmm	
HSK-50*	to 30.000 r.p.m.	≤ 1gmm	
HSK-63	to 25.000 r.p.m.		
HSK-80	to 20.000 r.p.m.		The values for chucks with taper shanks are empirical values which should not be exceeded (the values depend to a very great extent on the respective machine spindle)
HSK-100	to 16.000 r.p.m.		
SK30*	to 20.000 r.p.m.		
SK40	to 20.000 r.p.m.		
SK50	to 16.000 r.p.m.		

No liability can be accepted for these specifications.

* All collet chucks with a total weight below 1kg → minimum residual imbalance

Please mind:

CENTRO|P types with long gauge length and a high length/diameter ratio (L/D) should not be run at maximum rpm. Please refer to our specific recommendations.

Limits to Balancing Grade

According to ISO standard 1940, the balancing standard is described using G. The balancing standard G corresponds to g/mmkg or µm and is in relation to the speed.

As an explanation: At a speed of 9,500 r.p.m. and a weight of 1 kg G2.5 means a permissible offset between the rotational axis and the centre of gravity axis of the spindle of 2.5 µm. At a speed of 19,000 r.p.m. it would be 1.25 µm and at 38,000 r.p.m. 0.625 µm. If the tool holder together with the tool weighs half the amount, i.e. 0.5 kg, the balance will also be halved.

Until now, so as to minimise guarantee claims the machine or spindle manufacturers demanded such excessively fine balancing that their demands could only be met by balancing the chuck and the cutter on the machine spindle.

In order to avoid the high economic costs this caused, draft standard DIN 69888 covering balancing requirements on rotating tool systems was agreed jointly by the machine, spindle, balancing machine and tool manufacturers. The standard is expected to be adopted officially in 2007, and it is a sensible solution in both technical and economic terms, since in that norm all residual imbalances are indicated in „gmm“ and not assigned to a balance grade. Moreover, possible tool change faults are considered.

Grade steps to DIN ISO 1940-1

Permissible residual imbalances in relation to the balancing body weight for different grade steps G depending on the highest operating speed

General Formula

$$G = e \times \omega = \frac{U}{m_R} \times \frac{2 \times \pi \times n}{60} = \frac{U \times \pi \times n}{m_R \times 30}$$

$$\text{then } U = \frac{G \times m_R \times 30}{\pi \times n}$$

G = Balancing grade step

e = Centre of gravity concentricity, related imbalance

n = Speed

U = Imbalance

ω = Angular velocity

m_R = Weight of the tool or the rotor

[mm/s]


[gmm/kg or µm]

[r.p.m.]

[gmm]

[1/sec]

[g]

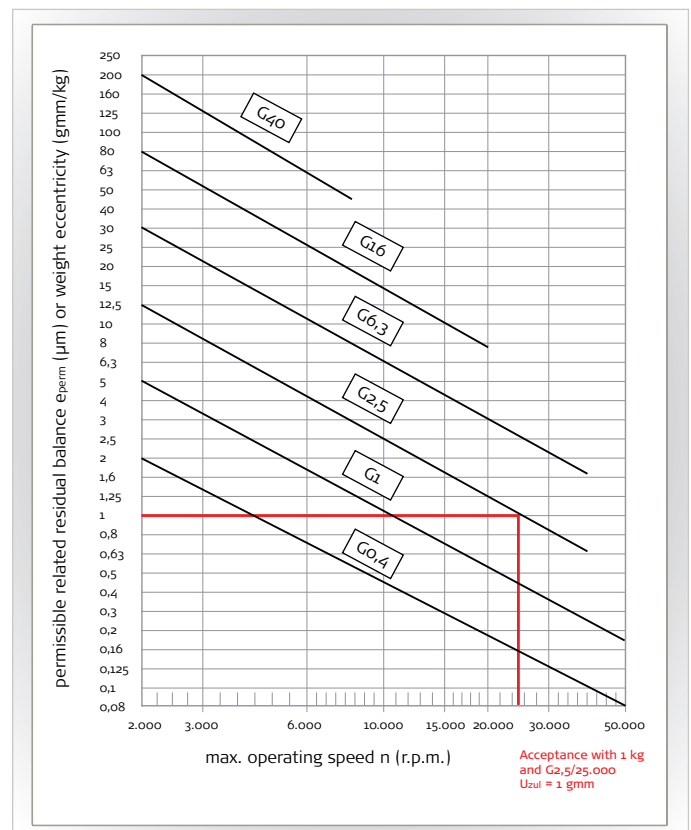

Technical Information | Balancing

Calculation of the total balancing grade of the assembled system (spindle • tool holder • tool)

Illustration of balancing grade total

Equation:

$$U_{\text{total}} = U_{\text{Spindle}} + U_{\text{Tool holder}} + U_{\text{Tool}}$$

Beispiel

$$U_{\text{total}} = U_{\text{Spindle (G 0,4)}} + U_{\text{Tool holder (G 2,5)}} + U_{\text{Tool (G 6,3)}}$$

Calculation of eccentricity

$$U = \frac{G \times 60}{2 \times \pi \times n} \times m$$

Spindle:

$$U_{\text{Spindle}} = \frac{0,4 \times 60}{2 \times \pi \times 30.000} \times 15.000 = 1,910$$

Tool holder:

$$U_{\text{Tool holder}} = \frac{2,5 \times 60}{2 \times \pi \times 30.000} \times 1.487 = 1,176$$

Tool:

$$U_{\text{Tool}} = \frac{6,3 \times 60}{2 \times \pi \times 30.000} \times 230 = 0,461$$


Sum of total system:

$$U_{\text{total}} = 1,910 + 1,176 + 0,461 = 3,547$$

Balancing grade conversion of the total system

$$G = U_{\text{total}} \times 2 \times \pi \times \frac{n}{60 \times m_{\text{total}}}$$

Beispiel:
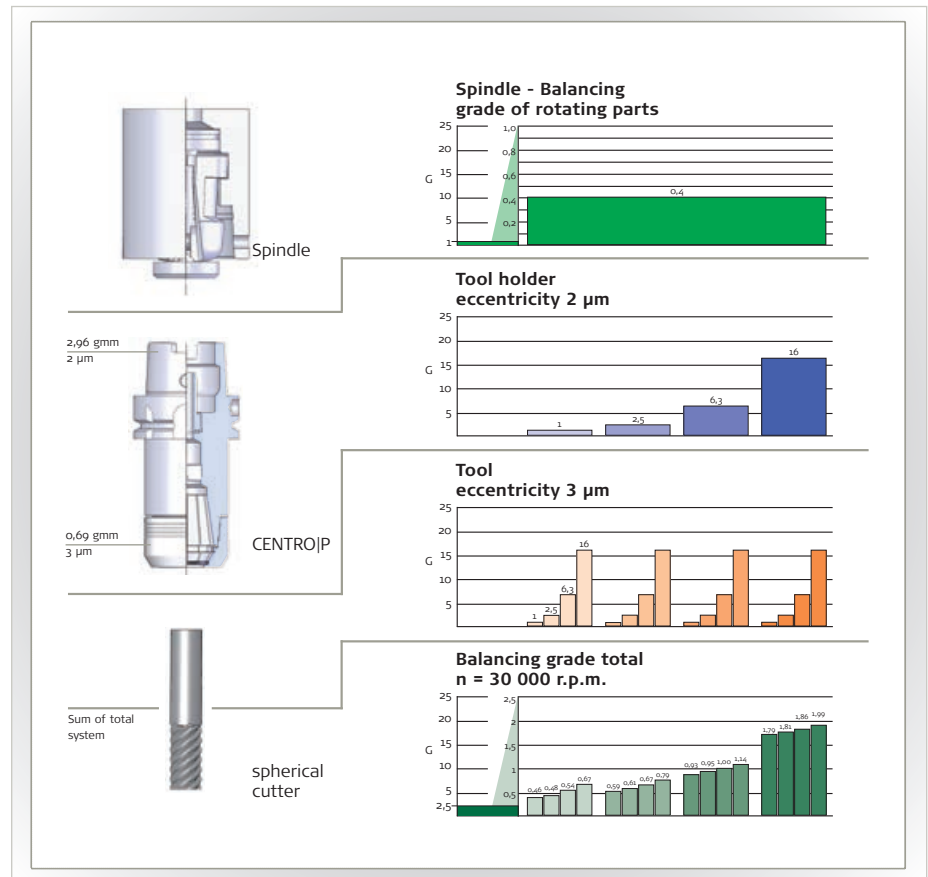
$$G = 3,547_{\text{gmm}} \times 2 \times \pi \times \frac{3.000 \times 1/\text{min}}{60 \times 16.708\text{g}} = 0,67$$


Calculation scheme with kind permission of Gühring oHG, Albstadt

Static or Dynamic Balancing

In practice balancing is very often carried out in one plane (Fig. 1). But the tool demonstrates only one centre of gravity error. The main axis of inertia and the rotational axis run in parallel to each other. This is known as "static" imbalance when the tool holder is relatively short in comparison with the diameter of the spindle holder.

In the case of long and thin tool holders balancing in two planes (Fig. 2) is sensible. In such cases, in addition to the existing centre of gravity error the main axis of inertia and the rotational axis no longer run in parallel to each other. This is known as a "dynamic" imbalance. The resulting imbalance moment generates a wobbling movement of the tool seat.

The following rule of thumb may act as a guide to whether the tool holder should be balanced as "static" or "dynamic":


Static balancing applies to tool holders

- = which have an operating speed of less than 20,000 r.p.m.
- = whose length (A) is less than double the diameter (D2)

Dynamic balancing applies to tool holders

- = which have an operating speed over 20,000 r.p.m.
- = whose length (A) is more than double the diameter (D2)

All single-cutter drilling and boring tools should be balanced in two planes.

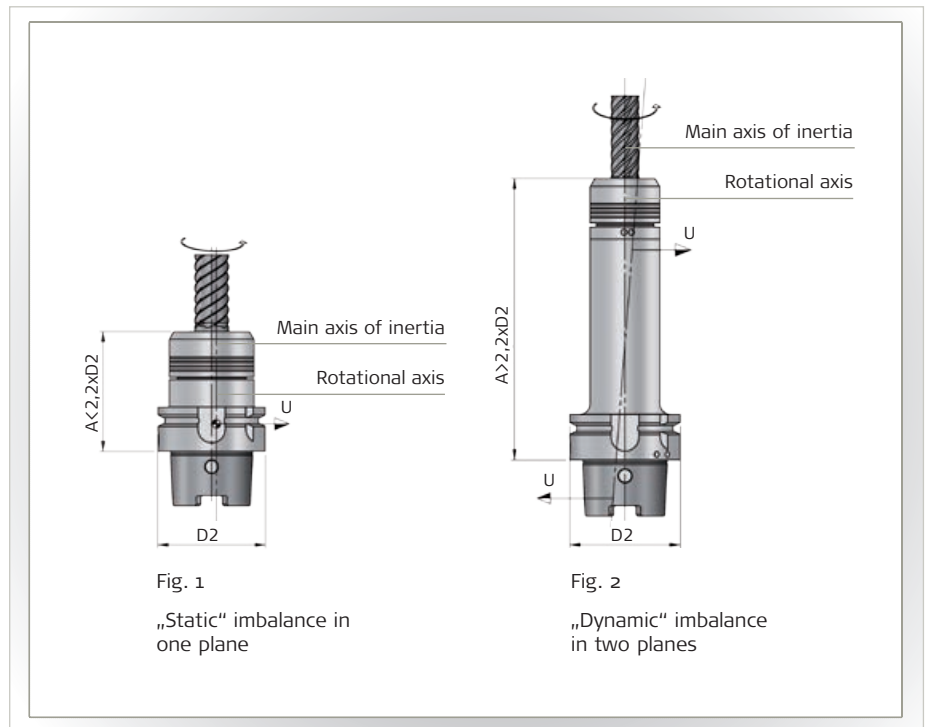

FAHRION offers a wide selection of precision collets, precision collet chucks as well as precision products for workpiece clamping which fulfil maximum requirements in terms of concentricity, service life and manufacturing quality. In doing so, FAHRION pays particular attention to user-friendly technology oriented towards the practical requirements of the users, which is constantly advanced.

The latest catalogue information is available
at any times at **www.fahrion.de**

FAHRION Vertriebs-GmbH
Forststraße 54
73667 Kaisersbach
Germany
Phone +49 7184 9282-0
Fax +49 7184 9282-92
info@fahrion.de
www.fahrion.de
www.shop.fahrion.de